

## CalioTherm S Pro – Simple and Reliable Drinking Water Circulation



CalioTherm S Pro

**Applications:**

Drinking water circulation  
systems in single-family houses

**More information:**

[www.ksb.com/products](http://www.ksb.com/products)

# CalioTherm S Pro – Simple and Reliable Drinking Water Circulation in Single-Family Houses

## 1 Demand-driven operation

Optimised efficiencies. Available as variable-speed pump or with manual setting of up to 3 speed levels

## 2 Universal use

High-quality materials for a broad range of applications with fluid temperatures from 2 to 75 °C

## 3 Maximum availability


Low motor speeds and special sealing elements reduce wear to a minimum.

## 4 Cost efficiency

- Simple 3-button setting combined with speed control minimises commissioning and operating costs.
- Protective and manual functions of the pump keep service costs down.
- Maximum savings in operating costs by proportional-pressure or constant-pressure control modes combined with high-efficiency technology

## 5 Ease of handling and operation

- New: 230 V plug, benefit: the pump replaces any other make without the need to change the plug.
- Whisper quiet operation ( $\leq 30$  dB(A))

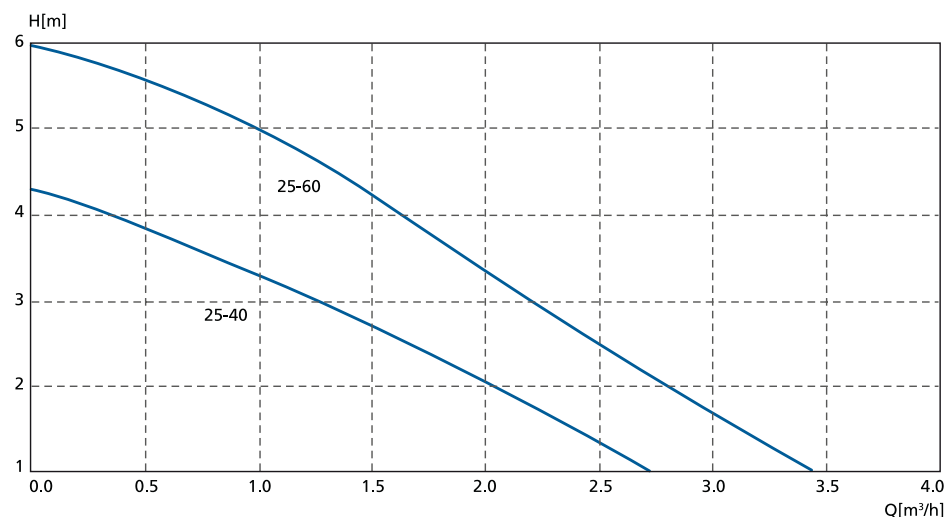

Calio-Therm S characteristic curves

### Technical data

Flow rate	Up to 3.5 m³/h
Head	Up to 6 mWC
Fluid temperature	+2 to +75 °C
Hardness of fluid handled	Up to 14 °dH
Operating pressure	PN 10
Pump connection	G 1 ½
Power supply	1~230 VAC 50/60 Hz
Enclosure	IPX4D



KSB SE & Co. KGaA  
Johann-Klein-Straße 9  
67227 Frankenthal (Germany)  
www.ksb.com