

KSB Safety Boost – Break Tank Package Booster Set



KSB Safety Boost MVP

Applications:

- Spray irrigation systems
- General irrigation systems
- Service water supply systems
- Domestic water supply
- Rainwater harvesting
- Water supply systems
- Industrial washing machines
- Car washes
- Butchers
- Cattle troughs

More information:
www.ksb.com



KSB Safety Boost 1/0608

KSB Safety Boost – Break Tank Package Booster Set, Category 5 to DIN EN 1717

Corrosion-resistant design

High-quality stainless steel

Space-saving

Very compact design

Fast and straightforward commissioning

- Ready-to-connect, pre-assembled and tested system
- Commissioning and operation supported by app (for MVP variant)

Hygienically safe

- Hygienic separation of drinking water eliminates any risk of contamination.
- Hygienically safe due to DVGW-certified float valve in accordance with KTW and W270
- Highest level of protection for category 5 liquids (type AB air gap)


Energy-efficient constant-pressure control

MVP variant with variable speed pump



KSB Safety Boost MVP

Characteristic curves

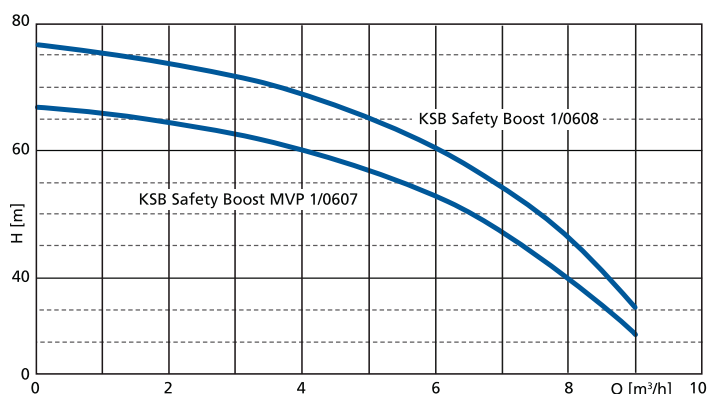

Technical data

Flow rate	Up to 7 m³/h, up to 1.9 l/s
Head	Up to 75 m
Fluid temperature	0 to 30 °C
Operating pressure	≤ 10 bar
Dimensions (L x D x H)	110 x 60 x 94 cm
Weight	Up to 100 kg



KSB SE & Co. KGaA
Johann-Klein-Straße 9
67227 Frankenthal (Germany)
www.ksb.com