

Self-priming Pump

Etaprime L/ Etaprime B

50 Hz

Characteristic Curves Booklet



Legal information/Copyright

Characteristic Curves Booklet Etaprime L/ Etaprime B

All rights reserved. The contents provided herein must neither be distributed, copied, reproduced, edited or processed for any other purpose, nor otherwise transmitted, published or made available to a third party without the manufacturer's express written consent.

Subject to technical modification without prior notice.

© KSB ITUR Spain, S.A., Zarautz, España 10.12.2015


Contents

Centrifugal Pumps with Shaft Seal	4
Self-priming Pump / Close-coupled Pump	4
Etaprime L / Etaprime B	4
General	4
Overview of sizes	5
Selection charts	6
Etaprime L/B, n = 2900 rpm	6
Etaprime L/B, n = 1450 rpm	7
Characteristic curves	8
n = 2900 rpm	8
n = 1450 rpm	22


Centrifugal Pumps with Shaft Seal

Self-priming Pump / Close-coupled Pump

Etaprime L / Etaprime B



Etaprime L



Etaprime B

General

NPSH values

The NPSH values indicated in the characteristic curves correspond to a head drop of 3 %.

NPSH values in low-flow conditions

NPSH values for flow rates below $Q = 0.3 \times Q_{opt}$ can only be measured with intense technical efforts. Evidence of NPSH values in the low-flow range cannot be provided.

Density of the fluid handled

The indicated heads and performance data apply to pumped fluids with a density $\rho = 1.0 \text{ kg/dm}^3$ and a kinematic viscosity of up to $20 \text{ mm}^2/\text{s}$ max. If the density $\neq 1.0$, the performance data must be multiplied by ρ . For viscosities $>20 \text{ mm}^2/\text{s}$ the corresponding data for cold water has to be calculated and the impact on the pump's performance has to be determined.

Friction loss

For some design variants (reinforced bearings, specific shaft seals) friction losses must be considered and indicated as additional power requirement in the data sheet.


Overview of sizes

Overview of sizes

Size	Etaprime L		Etaprime B	
	Speed [rpm]		Speed [rpm]	
	1450	2900	1450	2900
025-025-100	(⇒ Page 22)	(⇒ Page 8)	(⇒ Page 22)	(⇒ Page 8)
032-032-120	(⇒ Page 23)	(⇒ Page 9)	(⇒ Page 23)	(⇒ Page 9)
040-040-110	(⇒ Page 24)	(⇒ Page 10)	(⇒ Page 24)	(⇒ Page 10)
040-040-140	(⇒ Page 25)	(⇒ Page 11)	(⇒ Page 25)	(⇒ Page 11)
050-050-130	(⇒ Page 26)	(⇒ Page 12)	(⇒ Page 26)	(⇒ Page 12)
050-050-160	(⇒ Page 27)	(⇒ Page 13)	(⇒ Page 27)	(⇒ Page 13)
065-065-150	(⇒ Page 28)	(⇒ Page 14)	(⇒ Page 28)	(⇒ Page 14)
065-065-180	(⇒ Page 29)	(⇒ Page 15)	(⇒ Page 29)	(⇒ Page 15)
080-080-170	(⇒ Page 30)	(⇒ Page 16)	(⇒ Page 30)	(⇒ Page 16)
080-080-190	(⇒ Page 31)	(⇒ Page 17)	(⇒ Page 31)	(⇒ Page 17)
080-080-200	(⇒ Page 32)	(⇒ Page 18)	(⇒ Page 32)	(⇒ Page 18)
100-100-240.1	(⇒ Page 33)	(⇒ Page 19)	(⇒ Page 33)	(⇒ Page 19)
100-100-240	(⇒ Page 34)	(⇒ Page 20)	-	-
125-125-260	(⇒ Page 35)	(⇒ Page 21)	-	-


Selection charts

Etaprime L/B, n = 2900 rpm

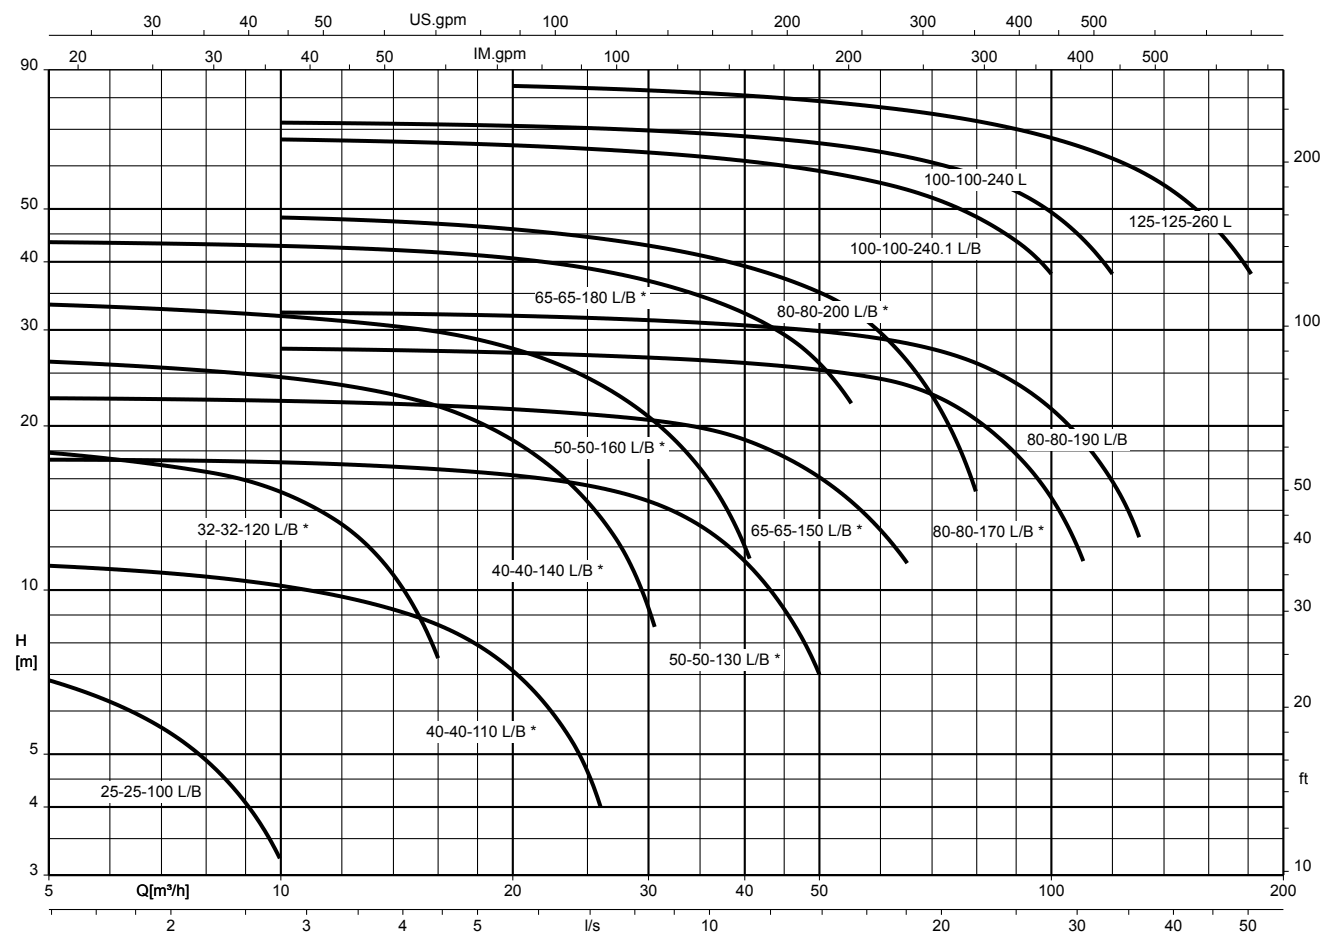

* Also available in stainless steel material variant

Etaprime L/B, n = 1450 rpm

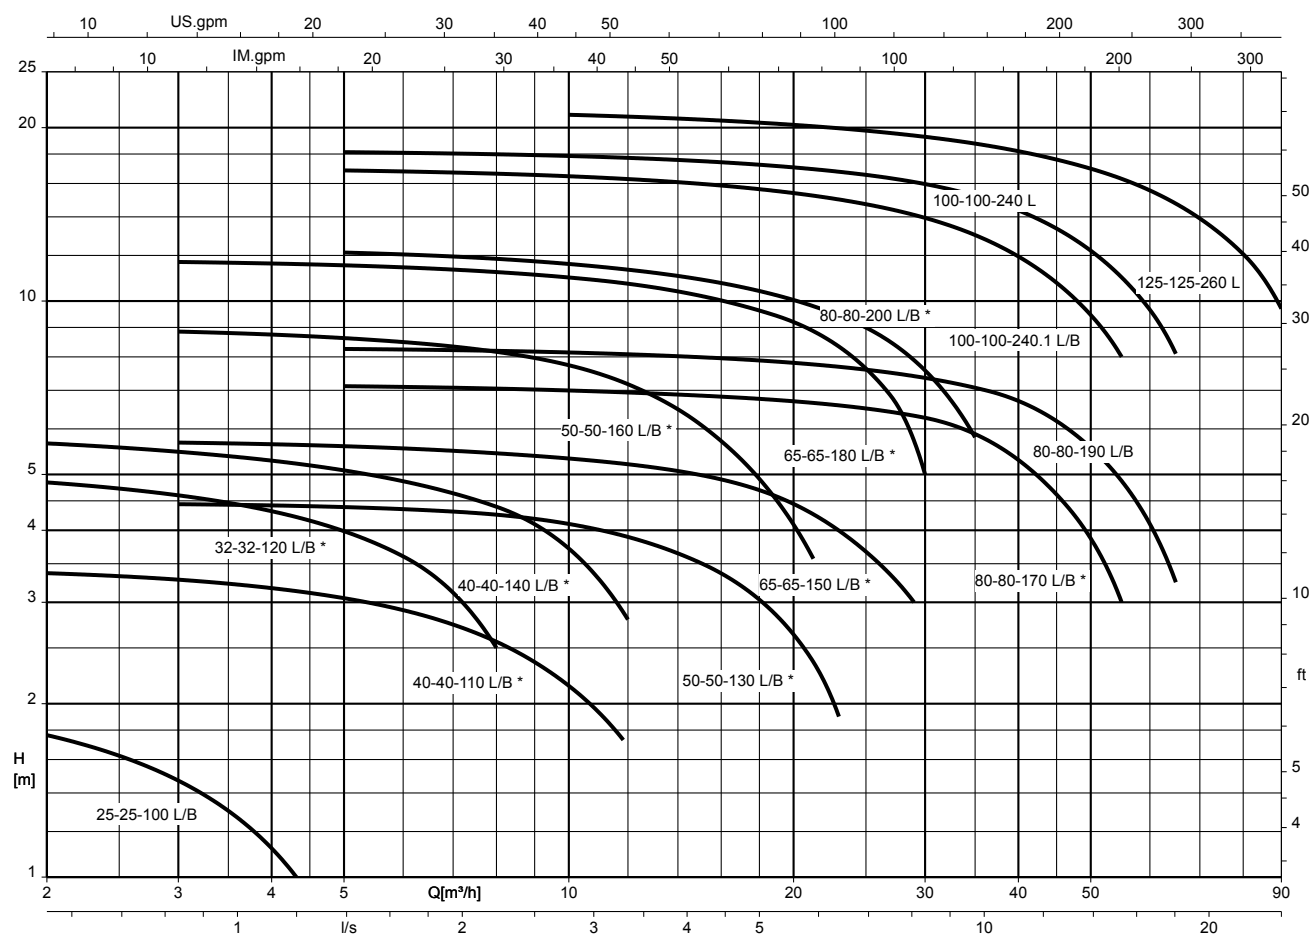


* Also available in stainless steel material variant


Characteristic curves

$n = 2900 \text{ rpm}$


Etaprime L/B 025-025-100, $n = 2900 \text{ rpm}$

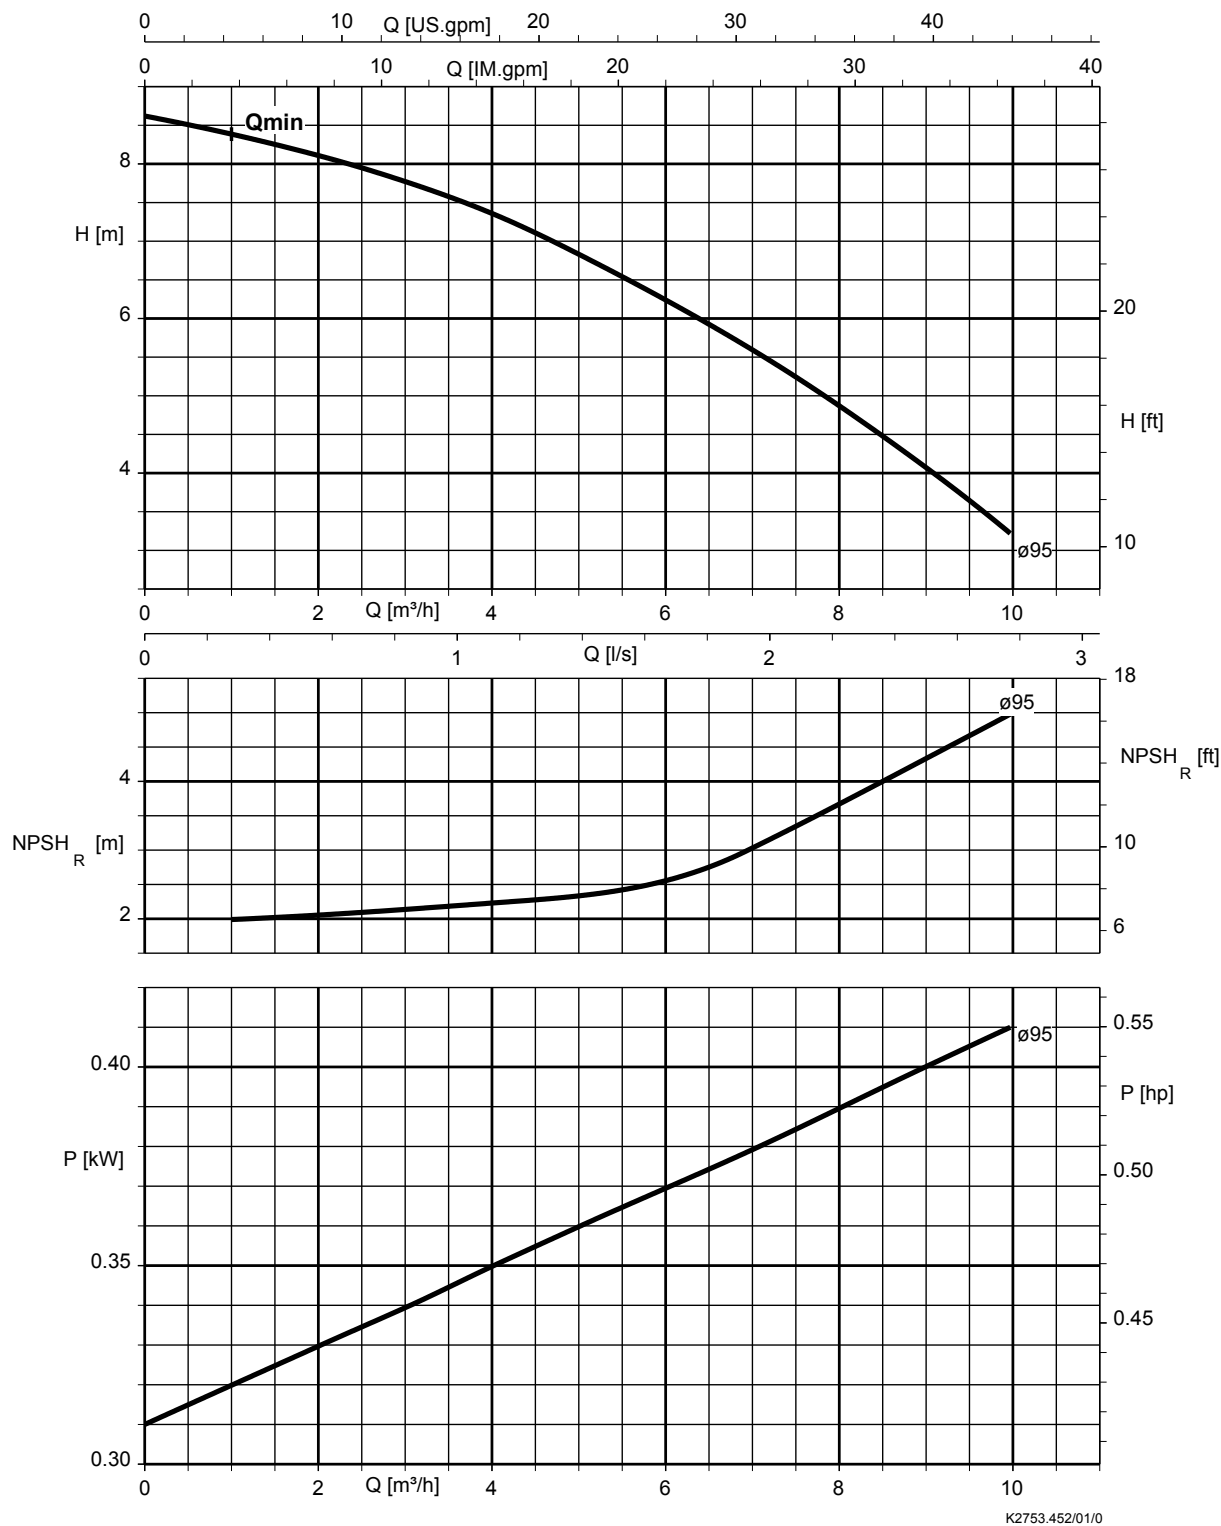


Etaprime L/B 032-032-120, n = 2900 rpm

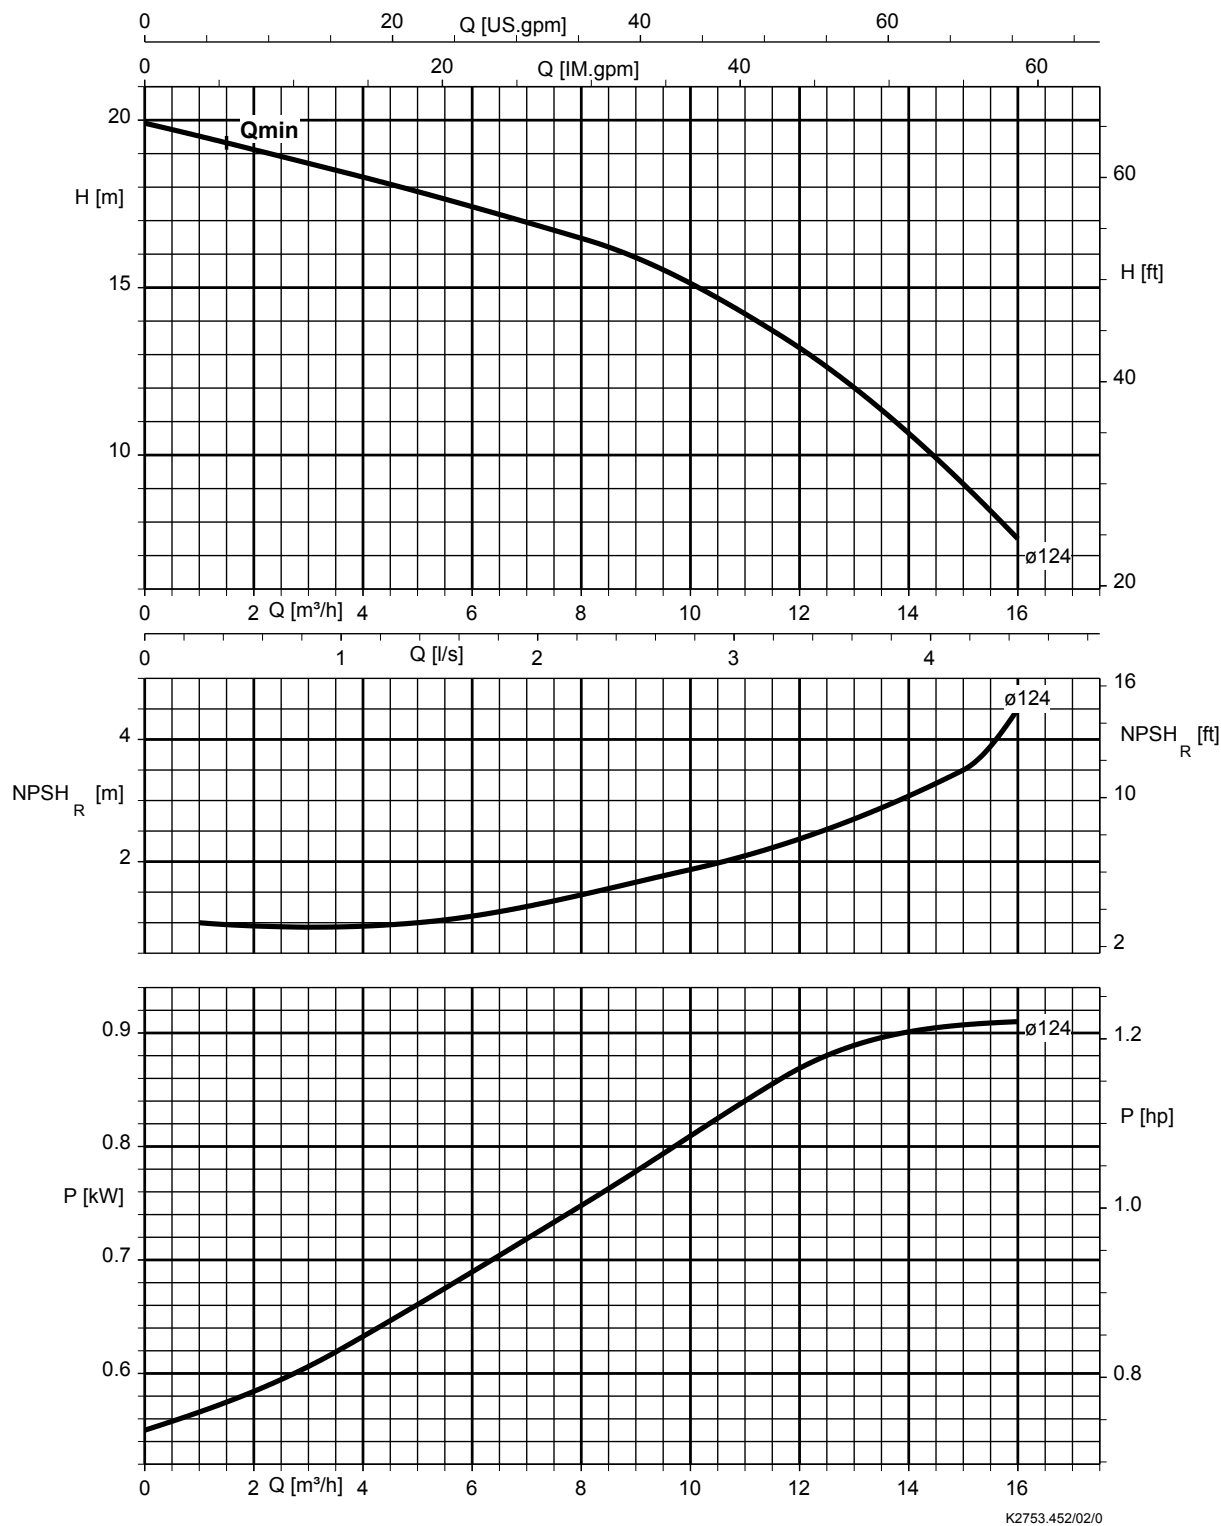


Etaprime L/B 040-040-110, n = 2900 rpm

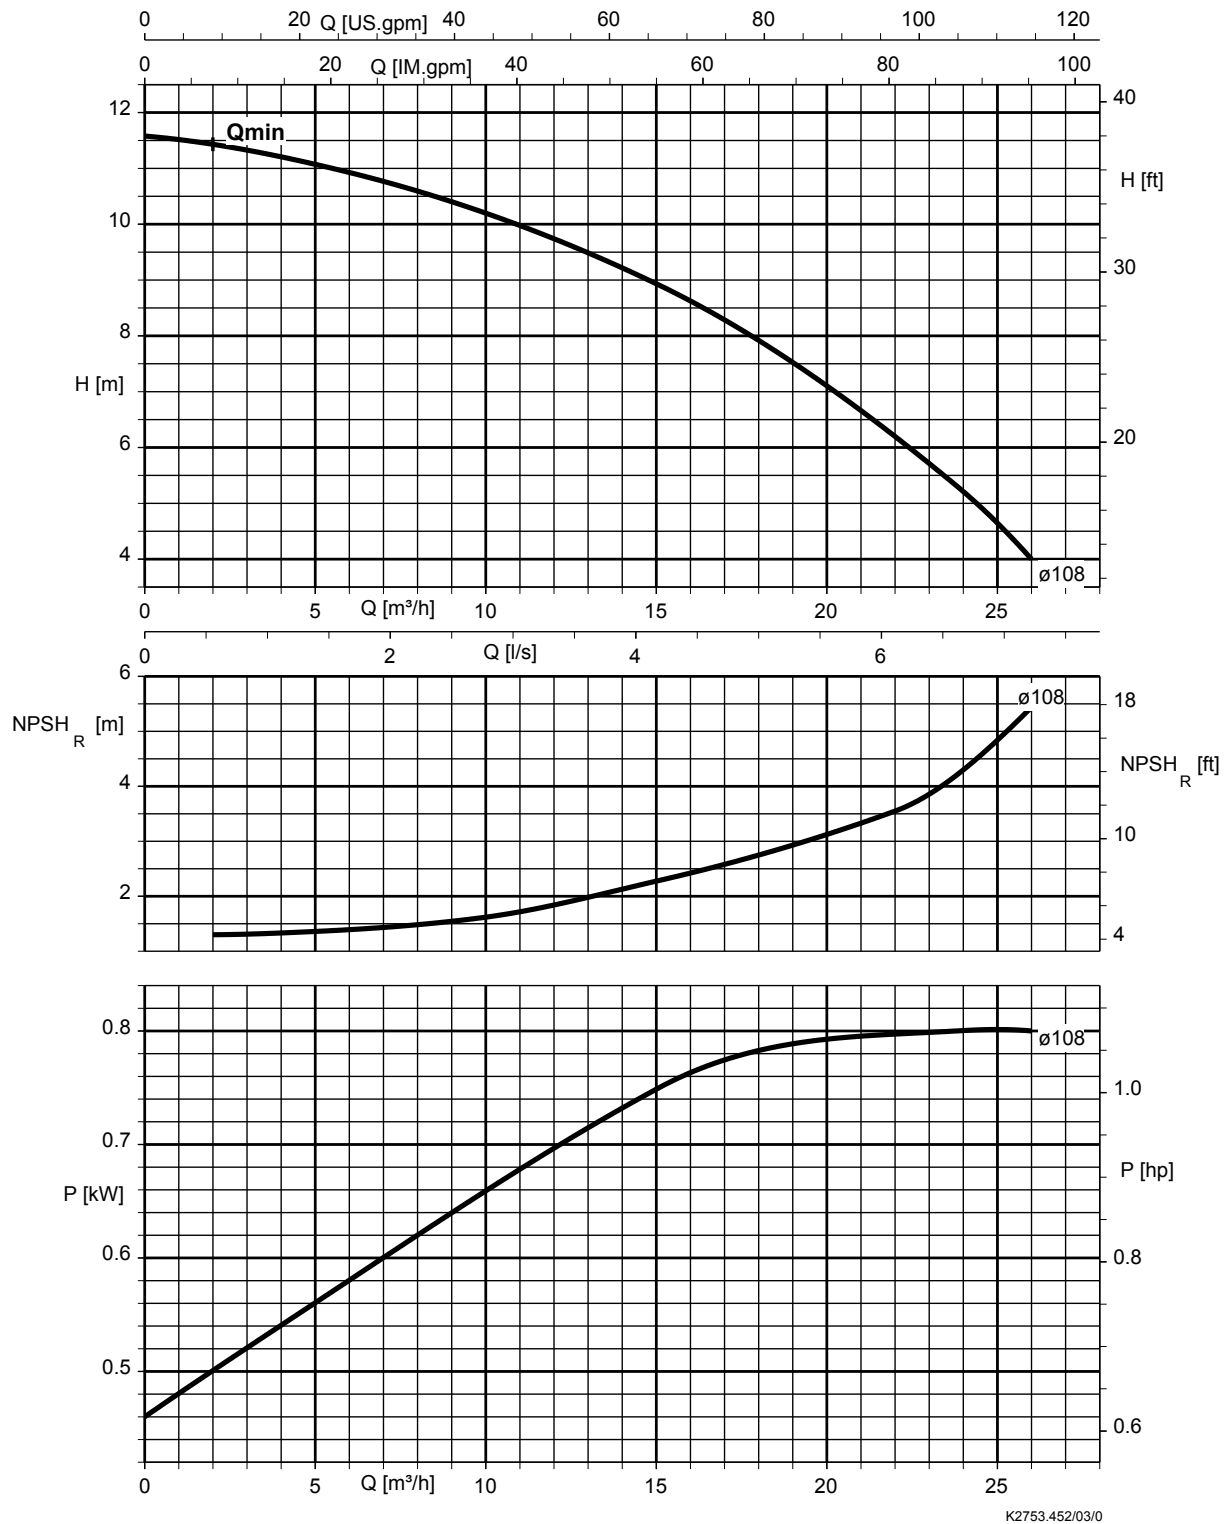


Etaprime L/B 040-040-140, n = 2900 rpm

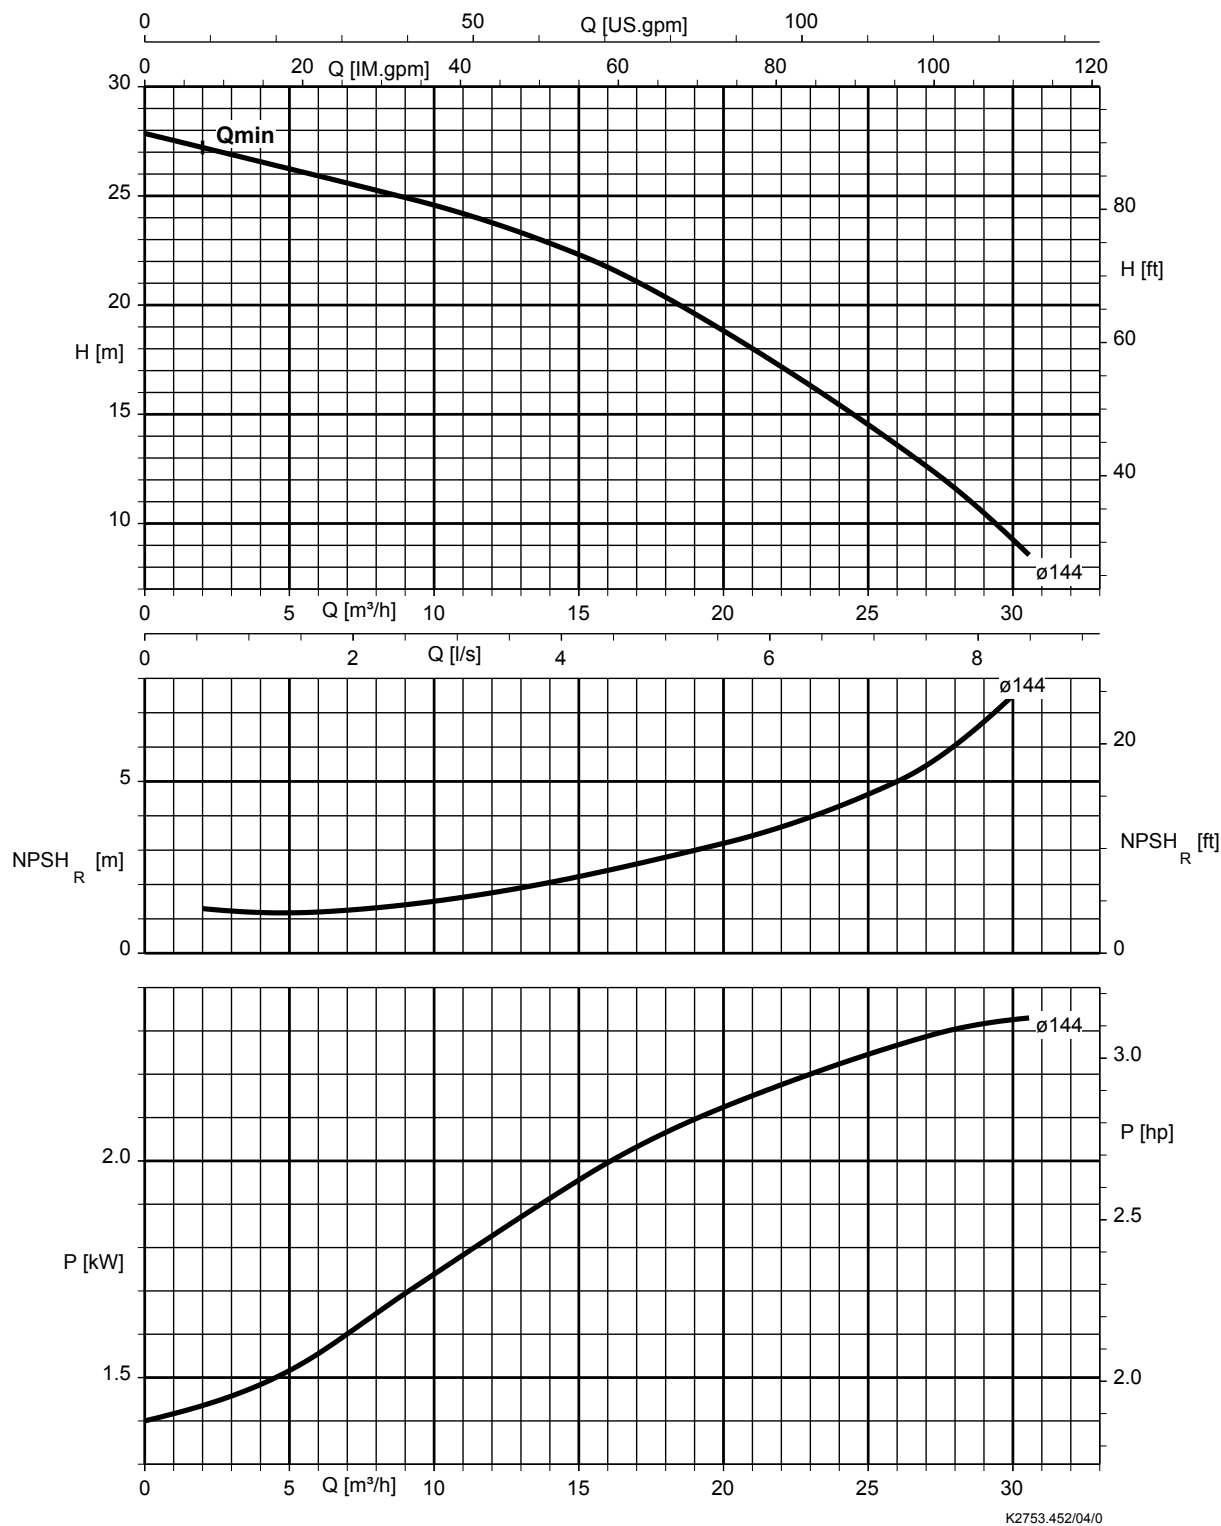


Etaprime L/B 050-050-130, n = 2900 rpm

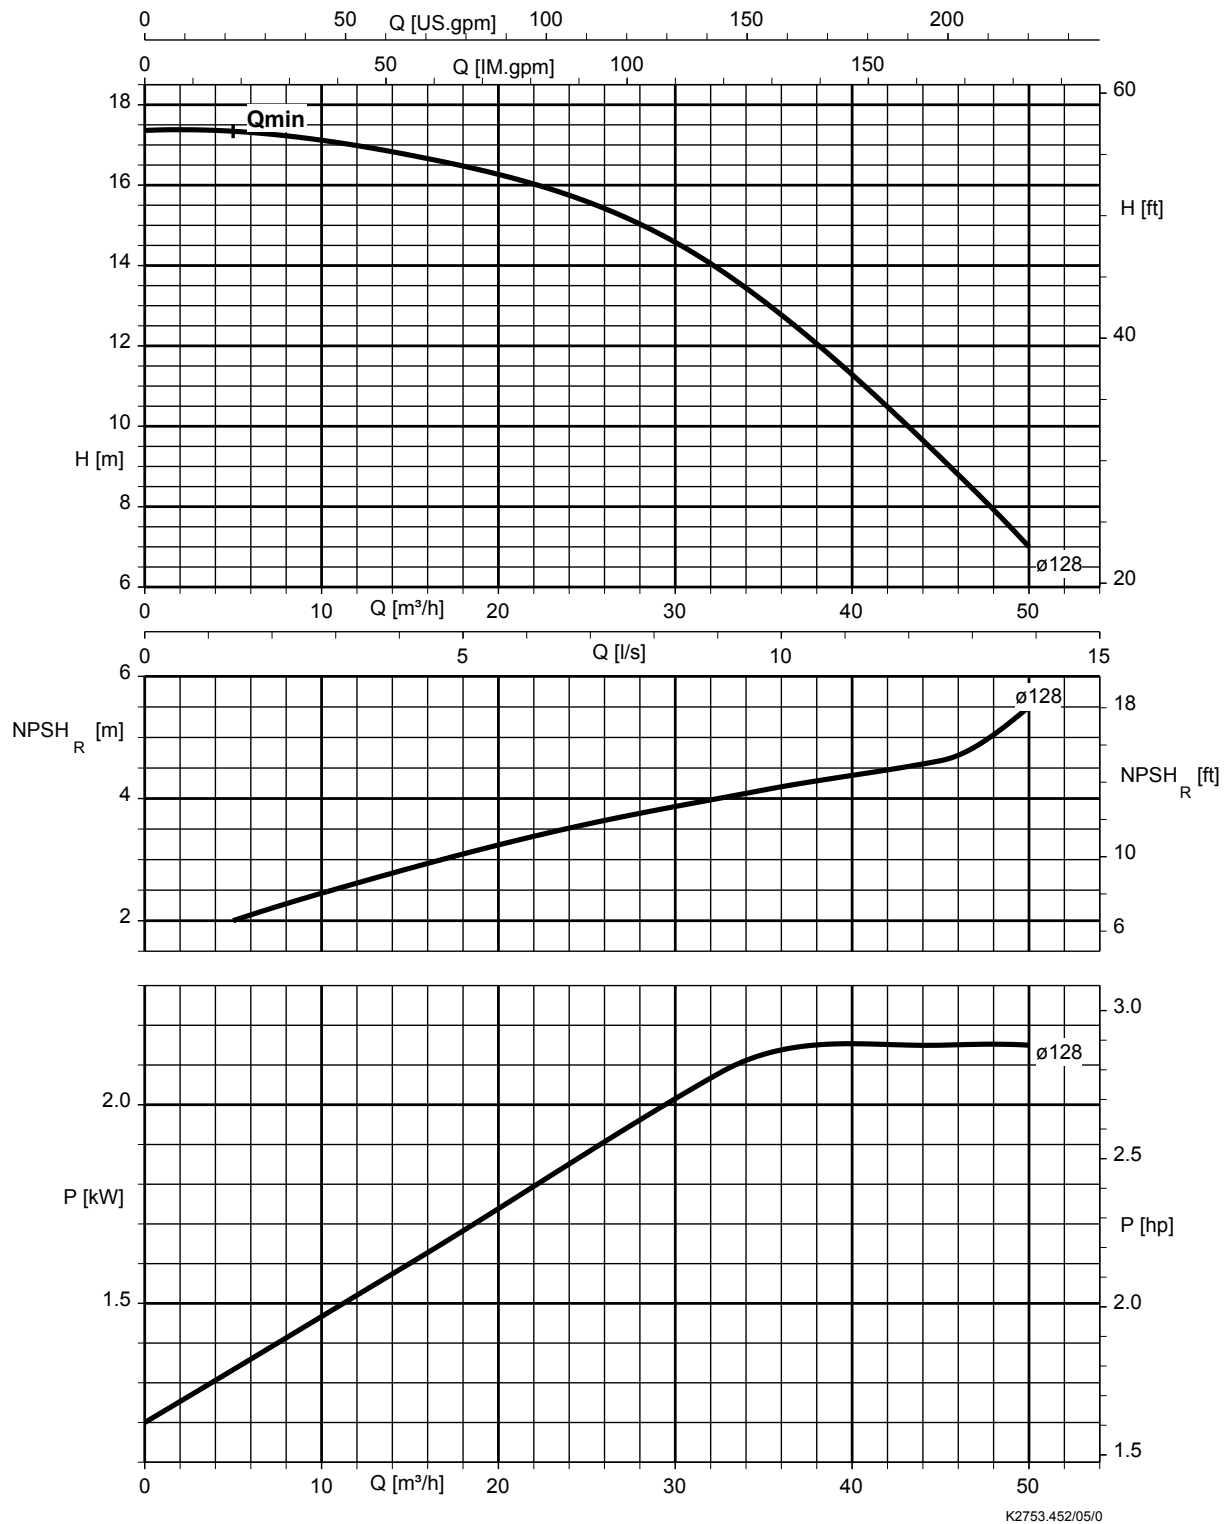


Etaprime L/B 050-050-160, n = 2900 rpm

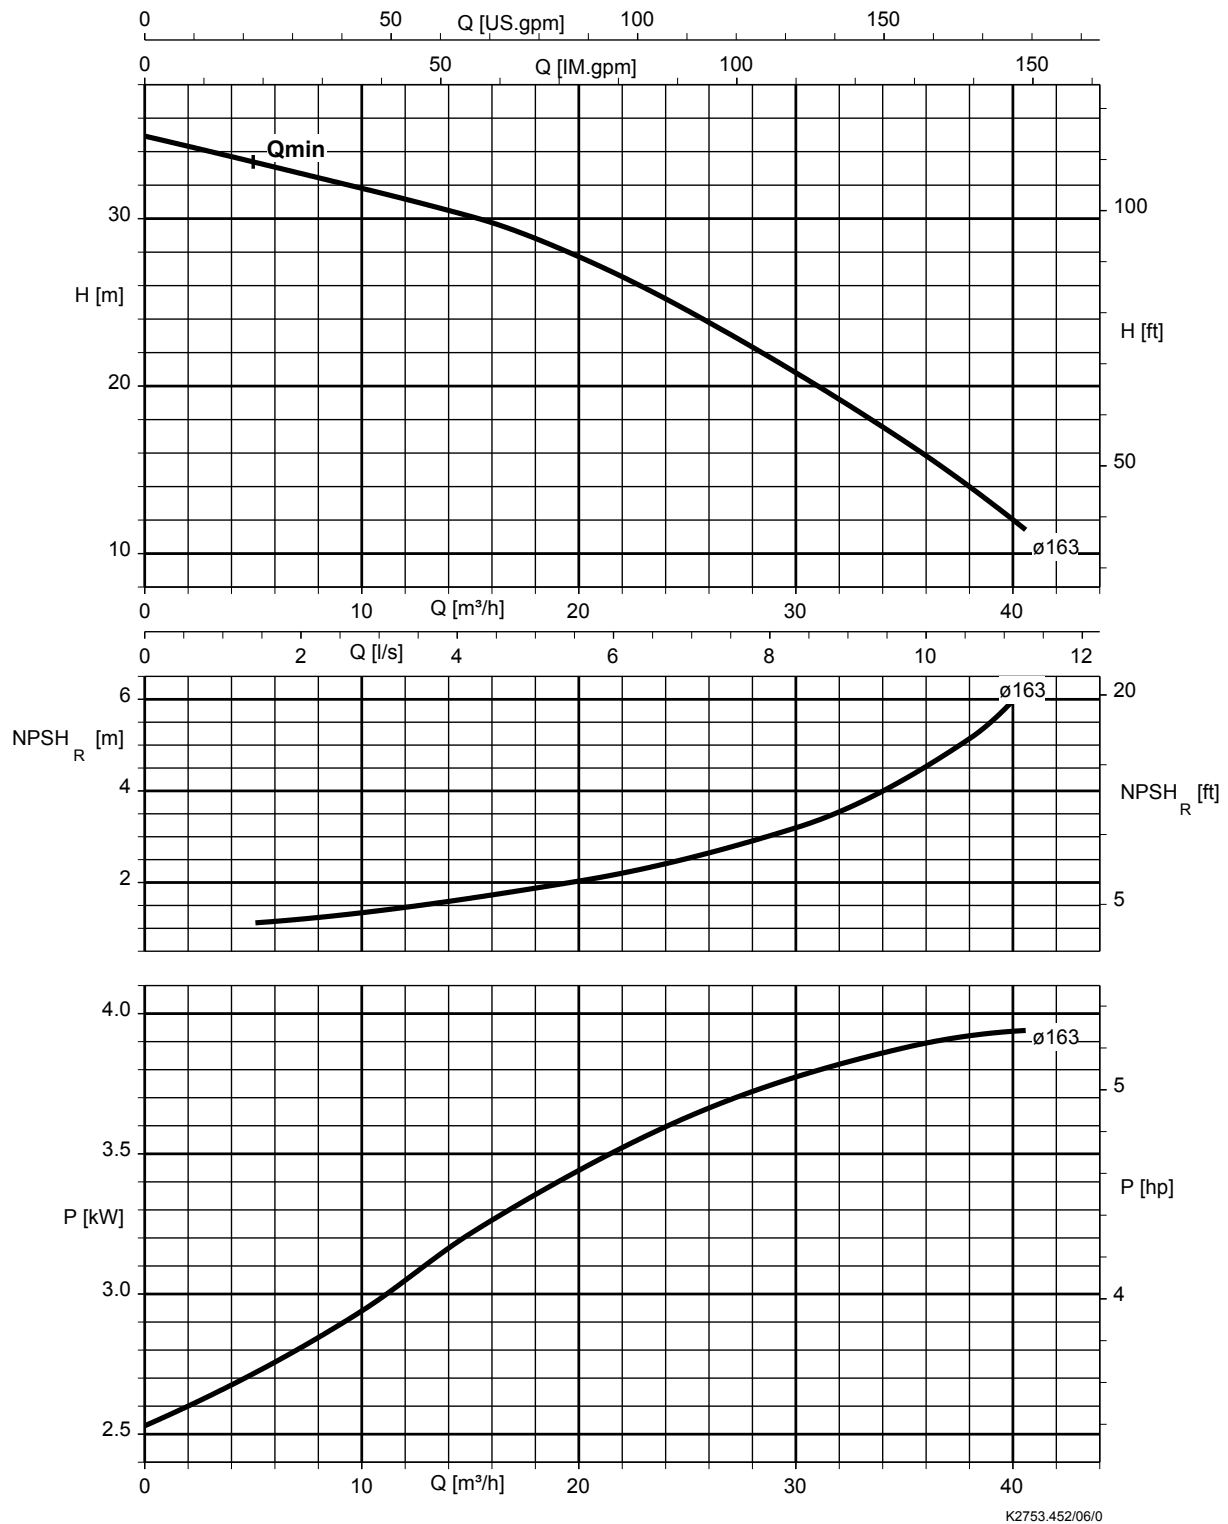


Etaprime L/B 065-065-150, n = 2900 rpm

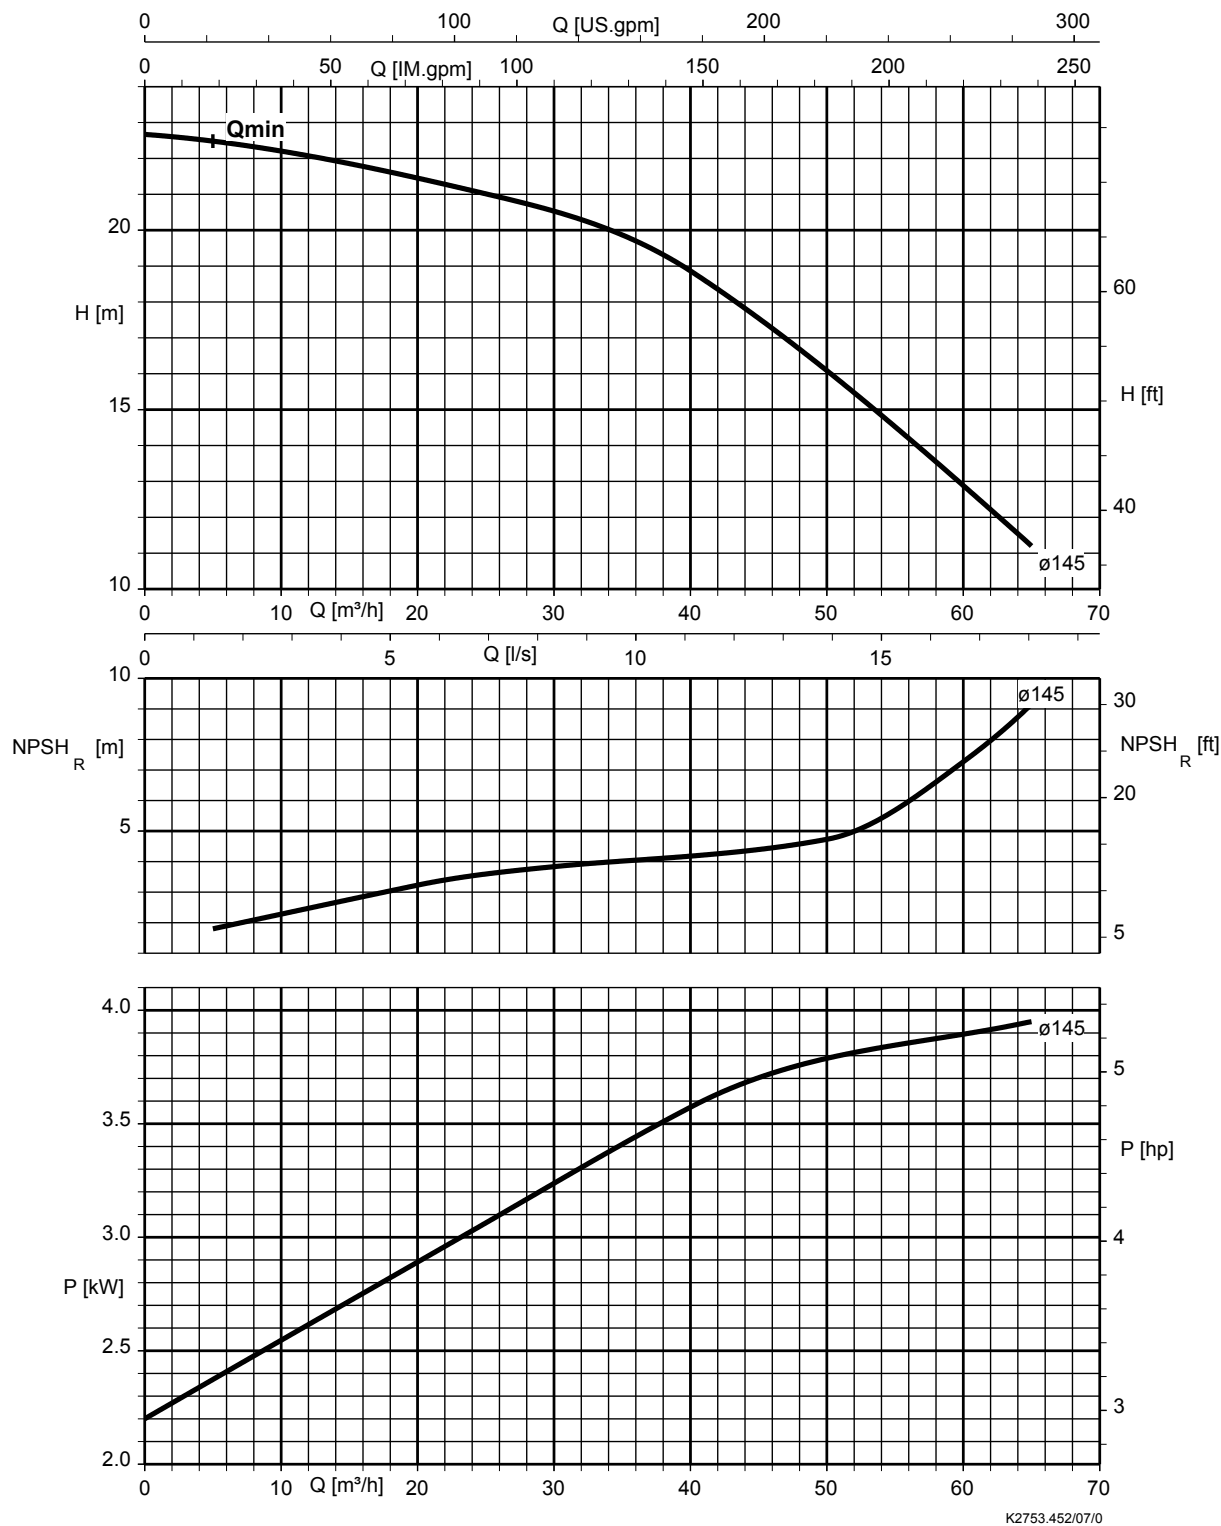


Etaprime L/B 065-065-180, $n = 2900$ rpm

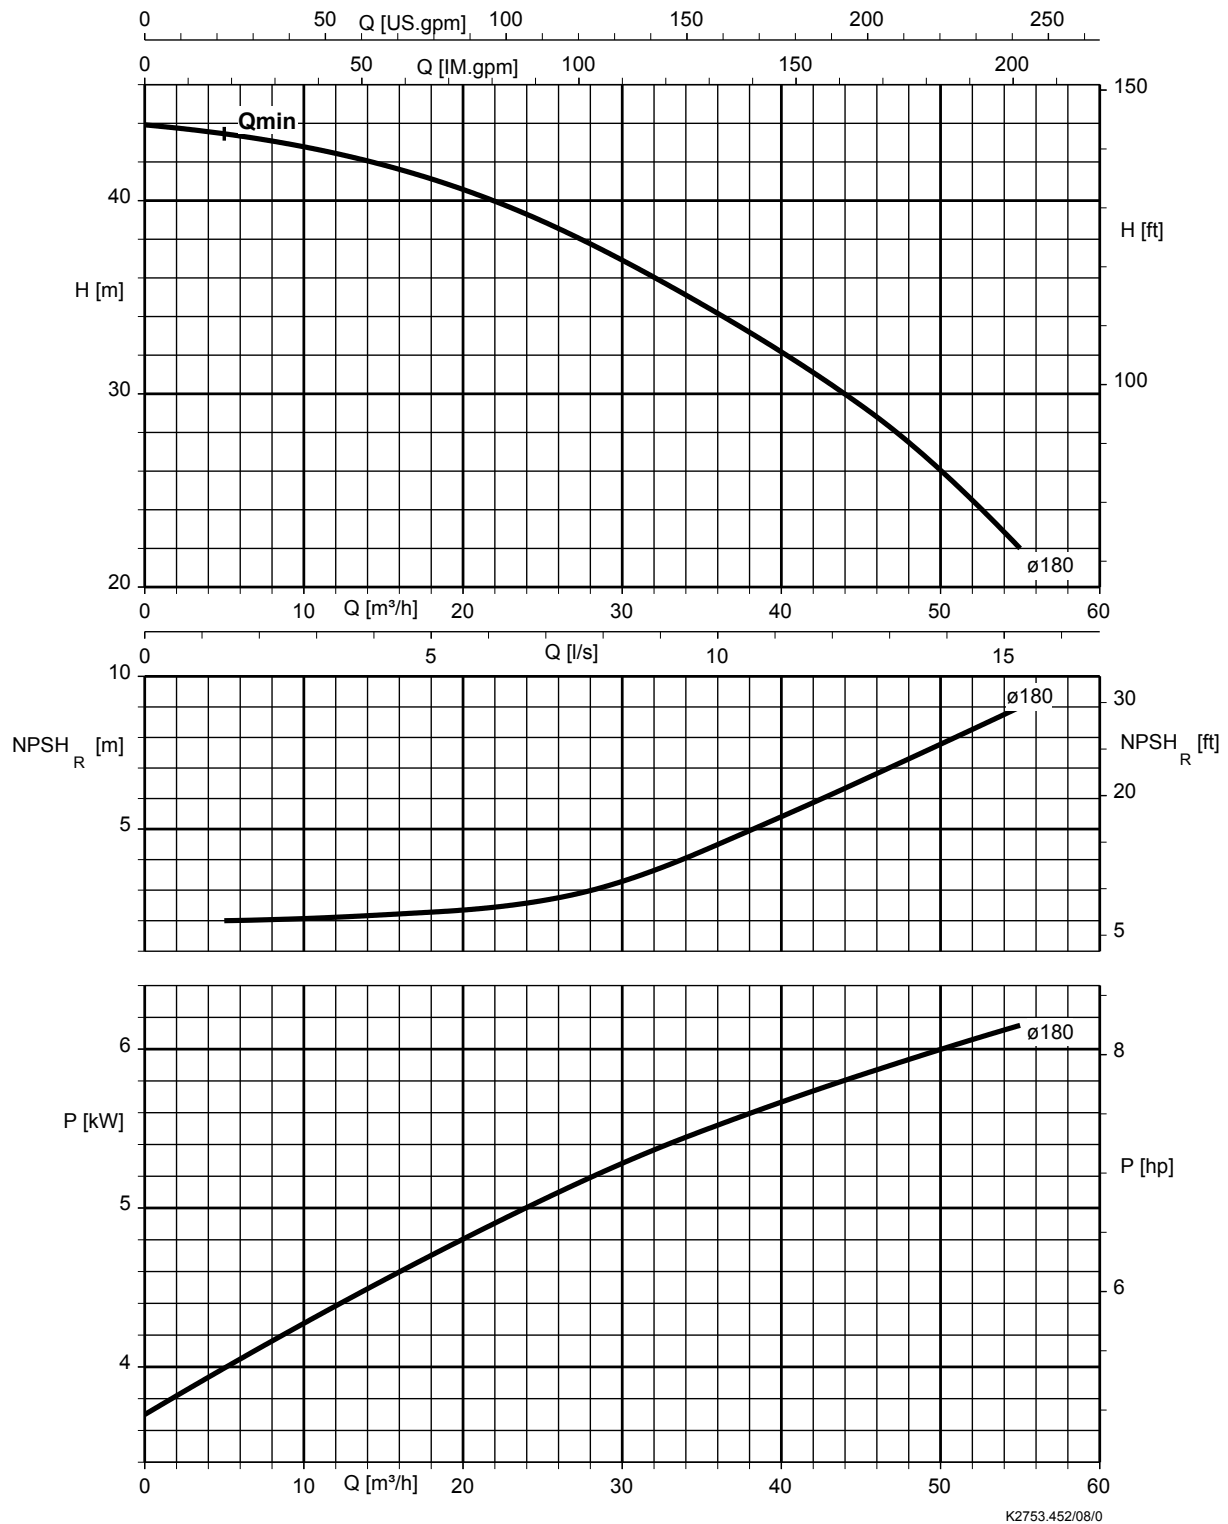


Etaprime L/B 080-080-170, $n = 2900$ rpm

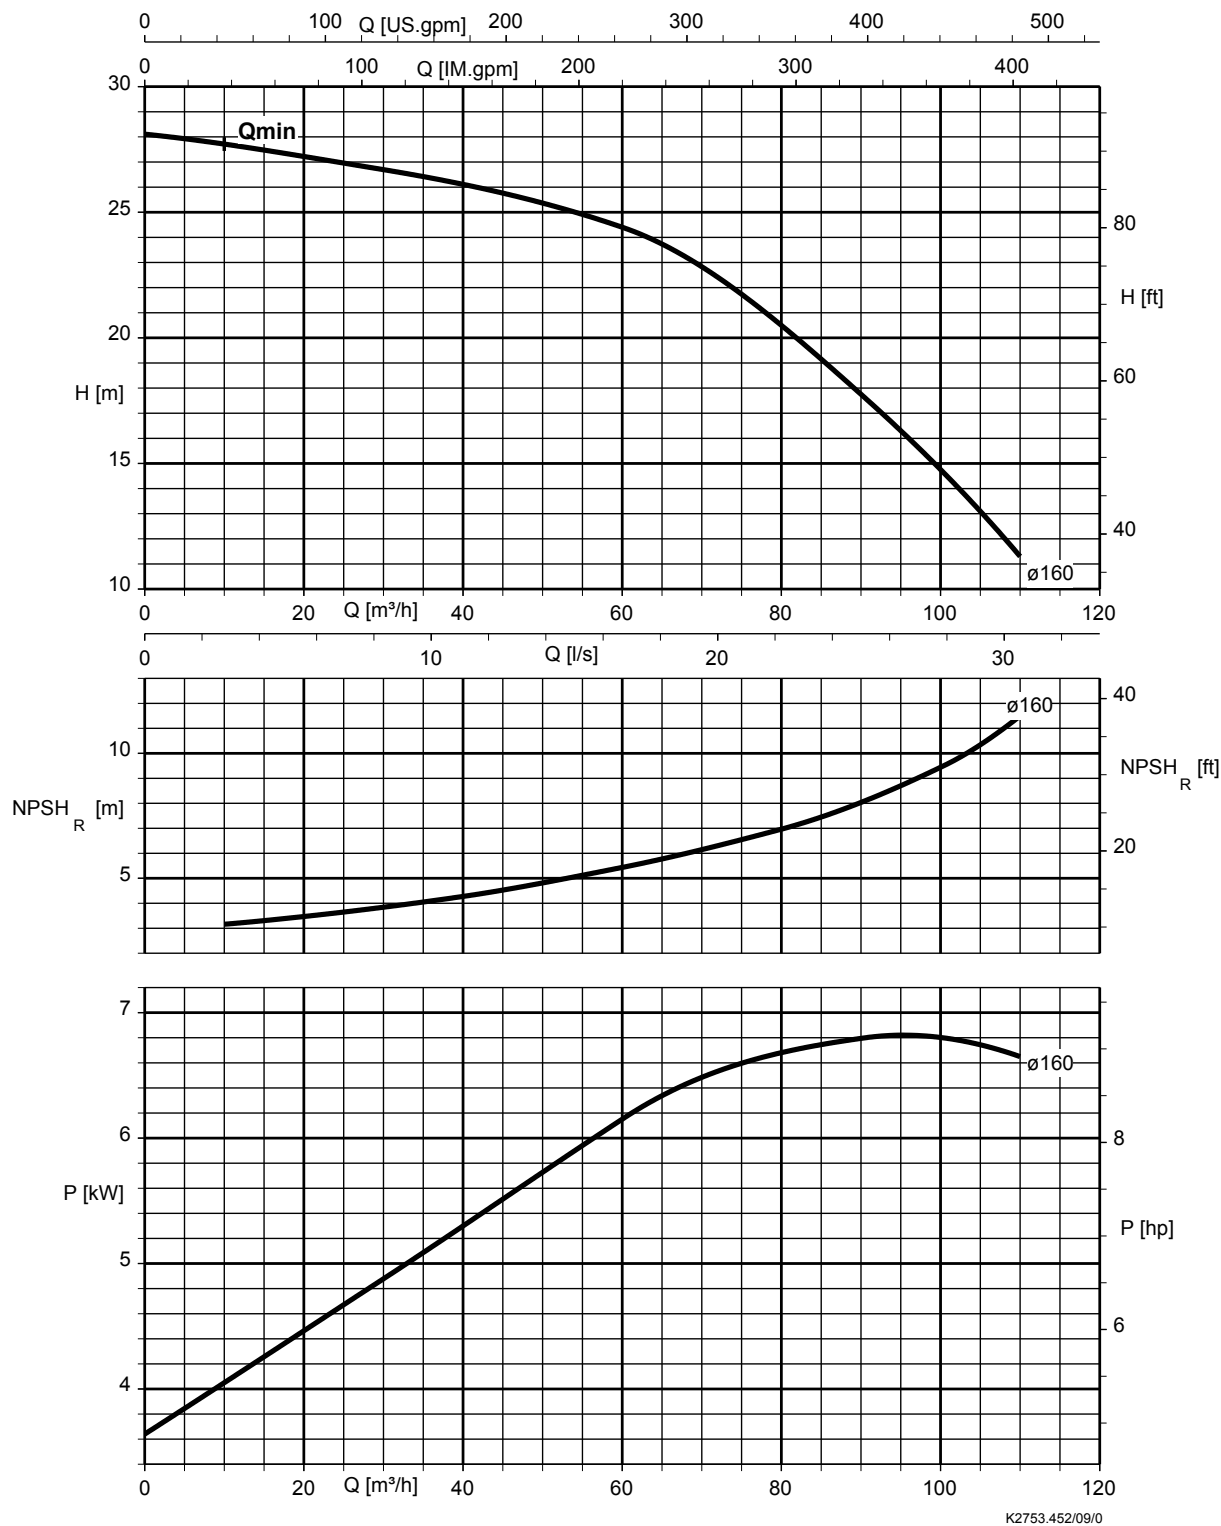


Etaprime L/B 080-080-190, n = 2900 rpm

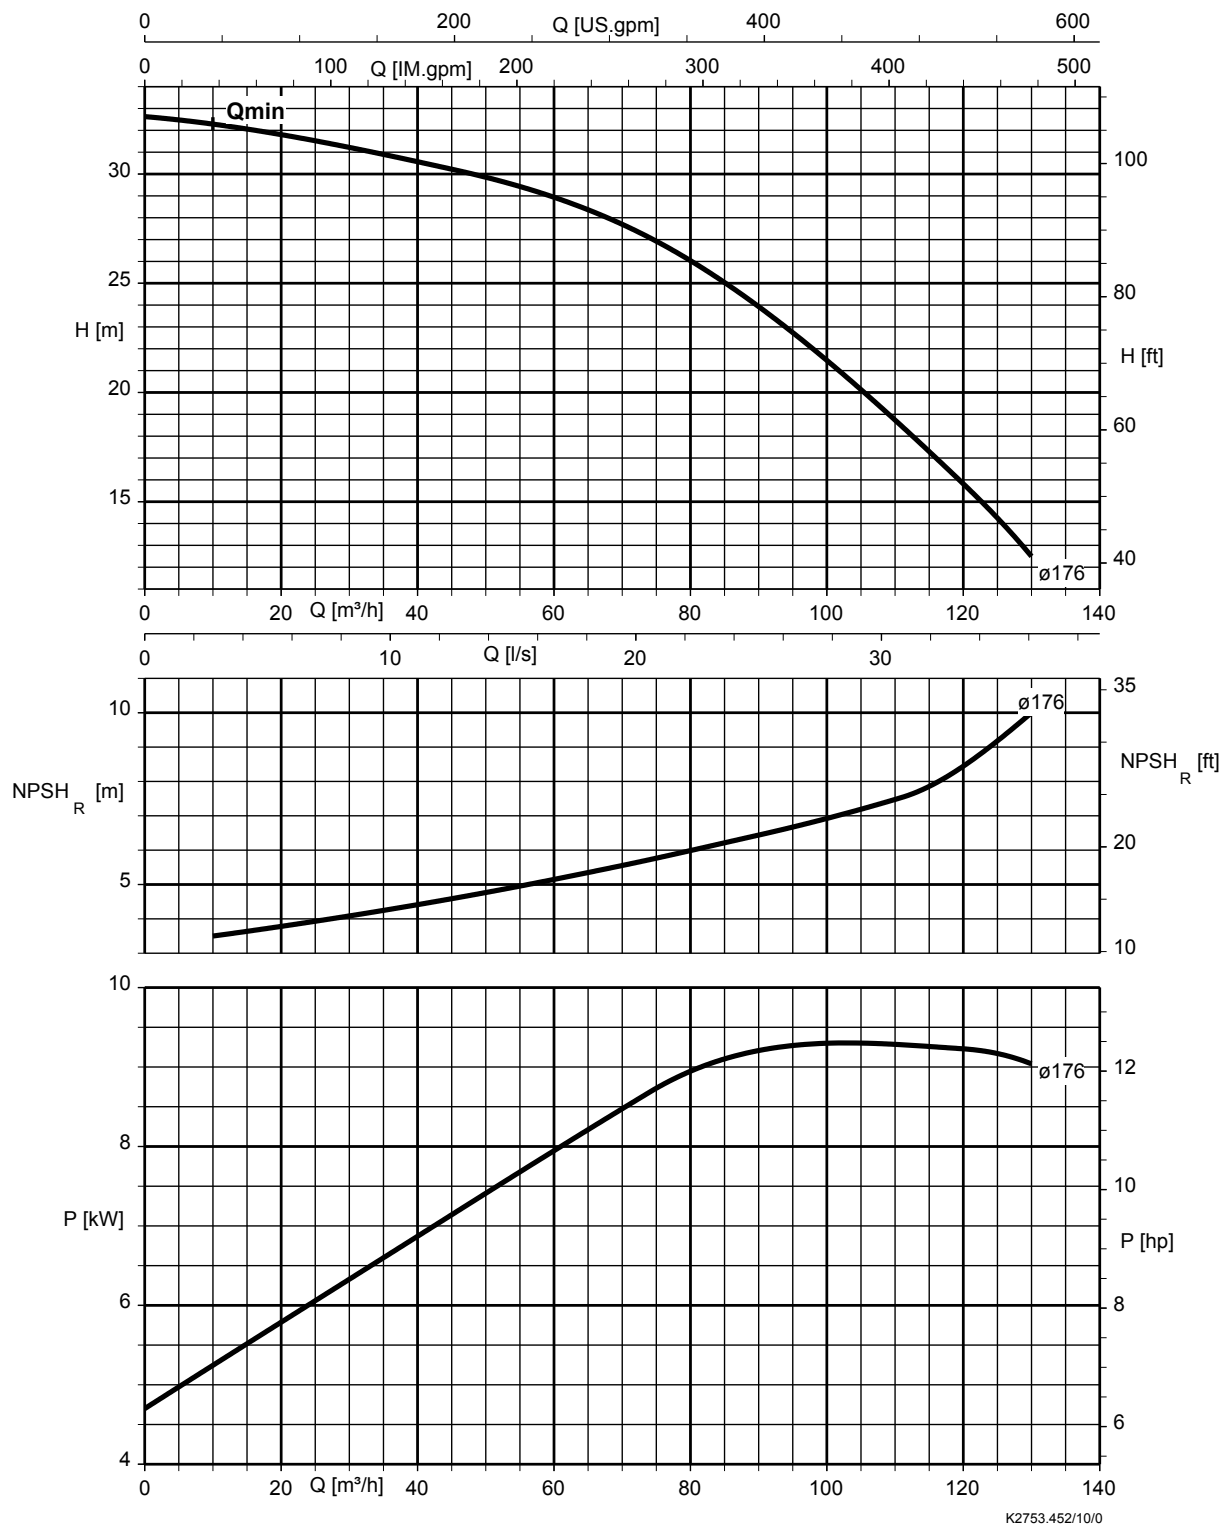


Etaprime L/B 080-080-200, n = 2900 rpm

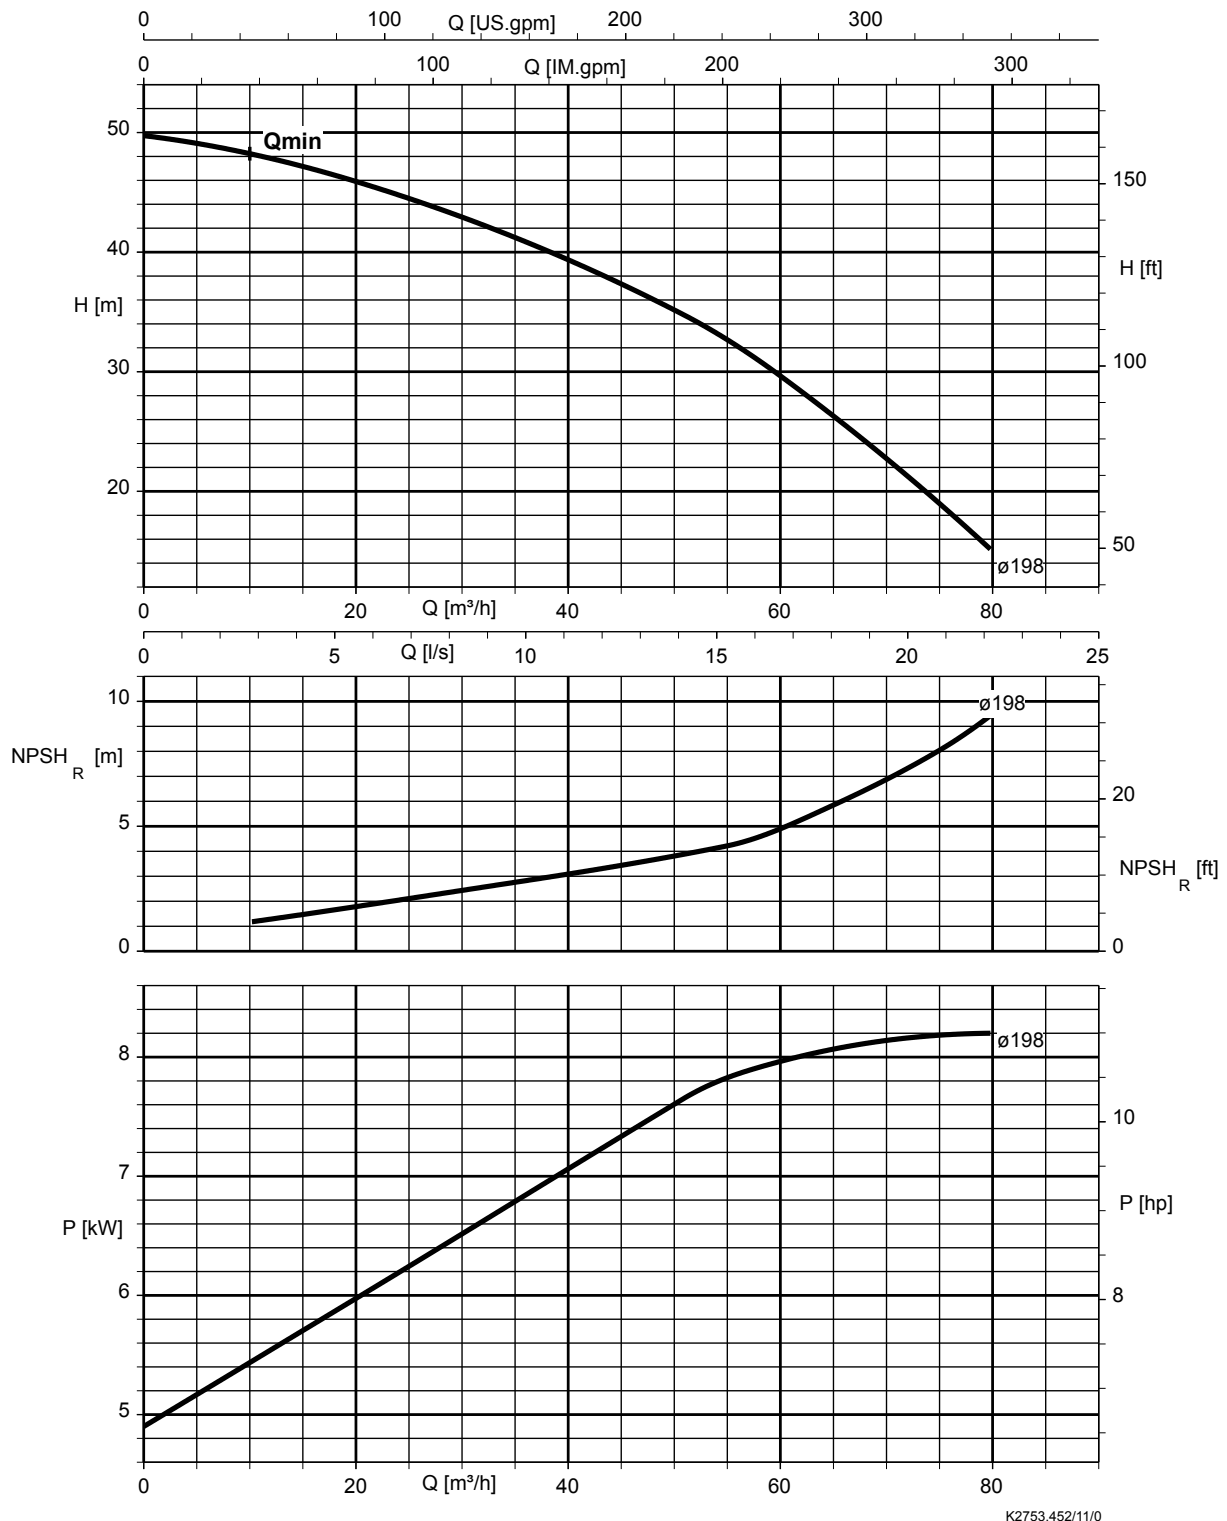


Etaprime L/B 100-100-240.1, n = 2900 rpm

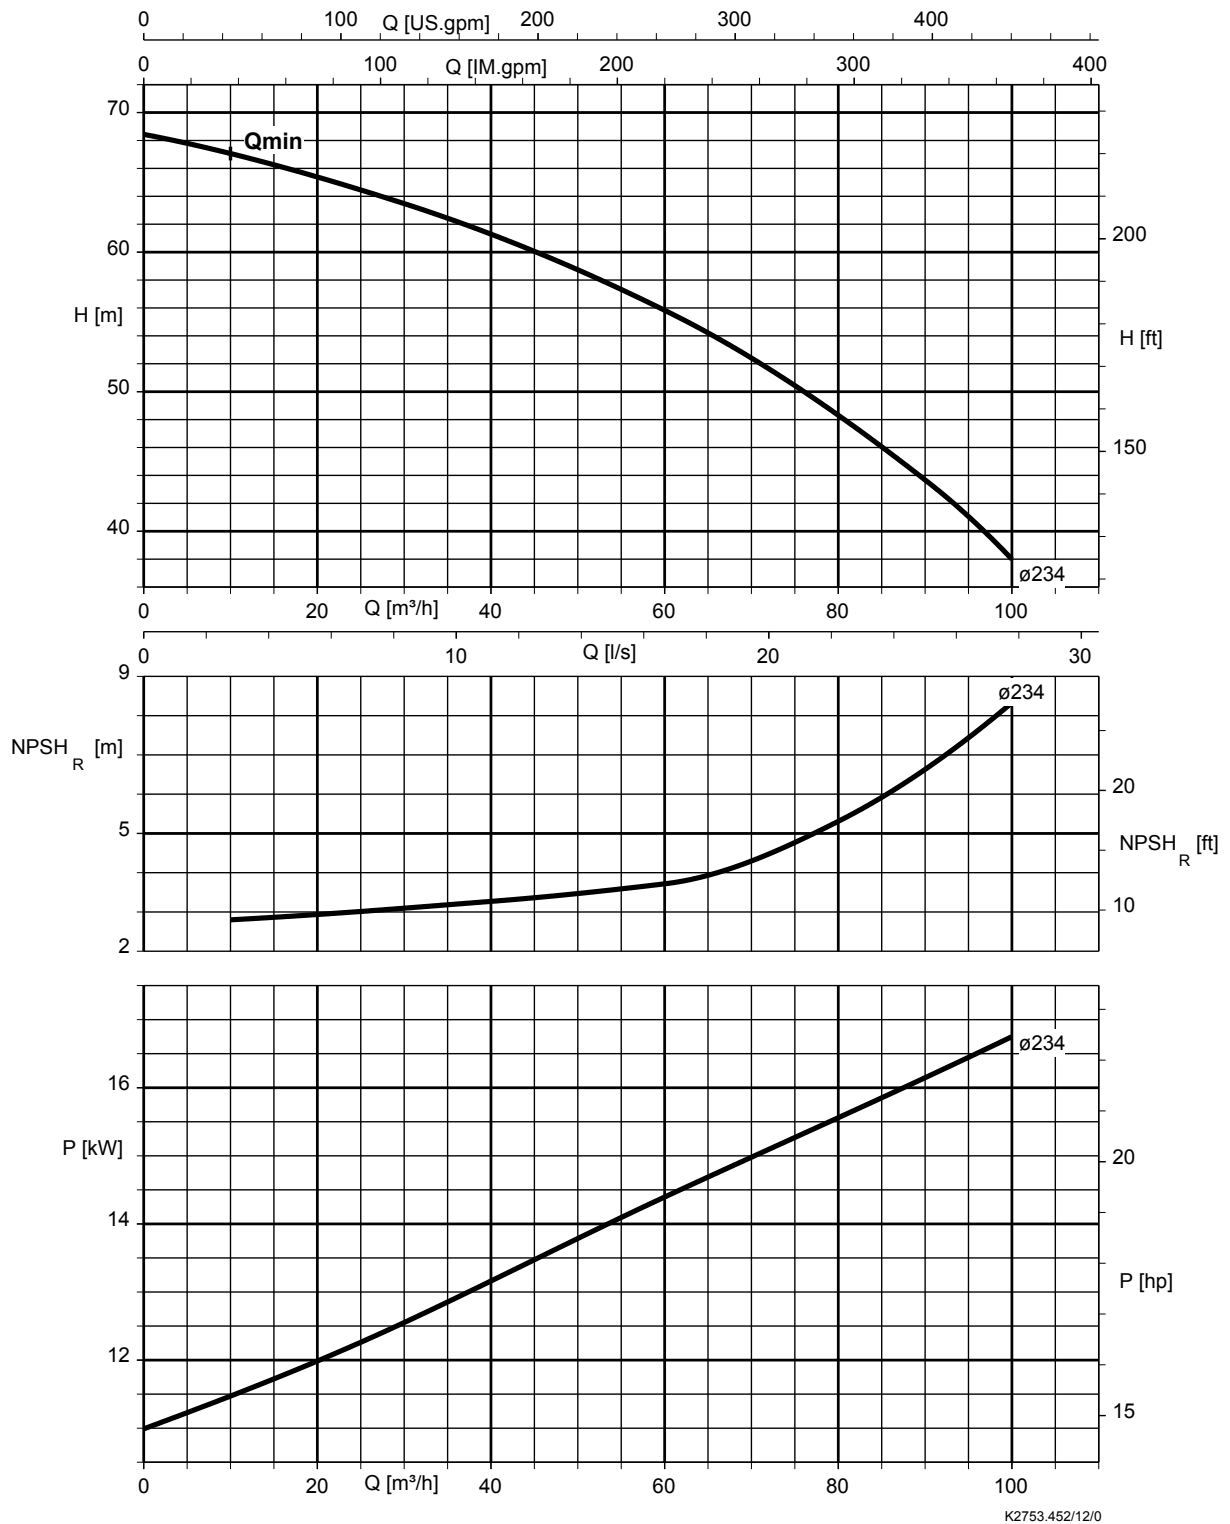

Etaprime L 100-100-240, n = 2900 rpm

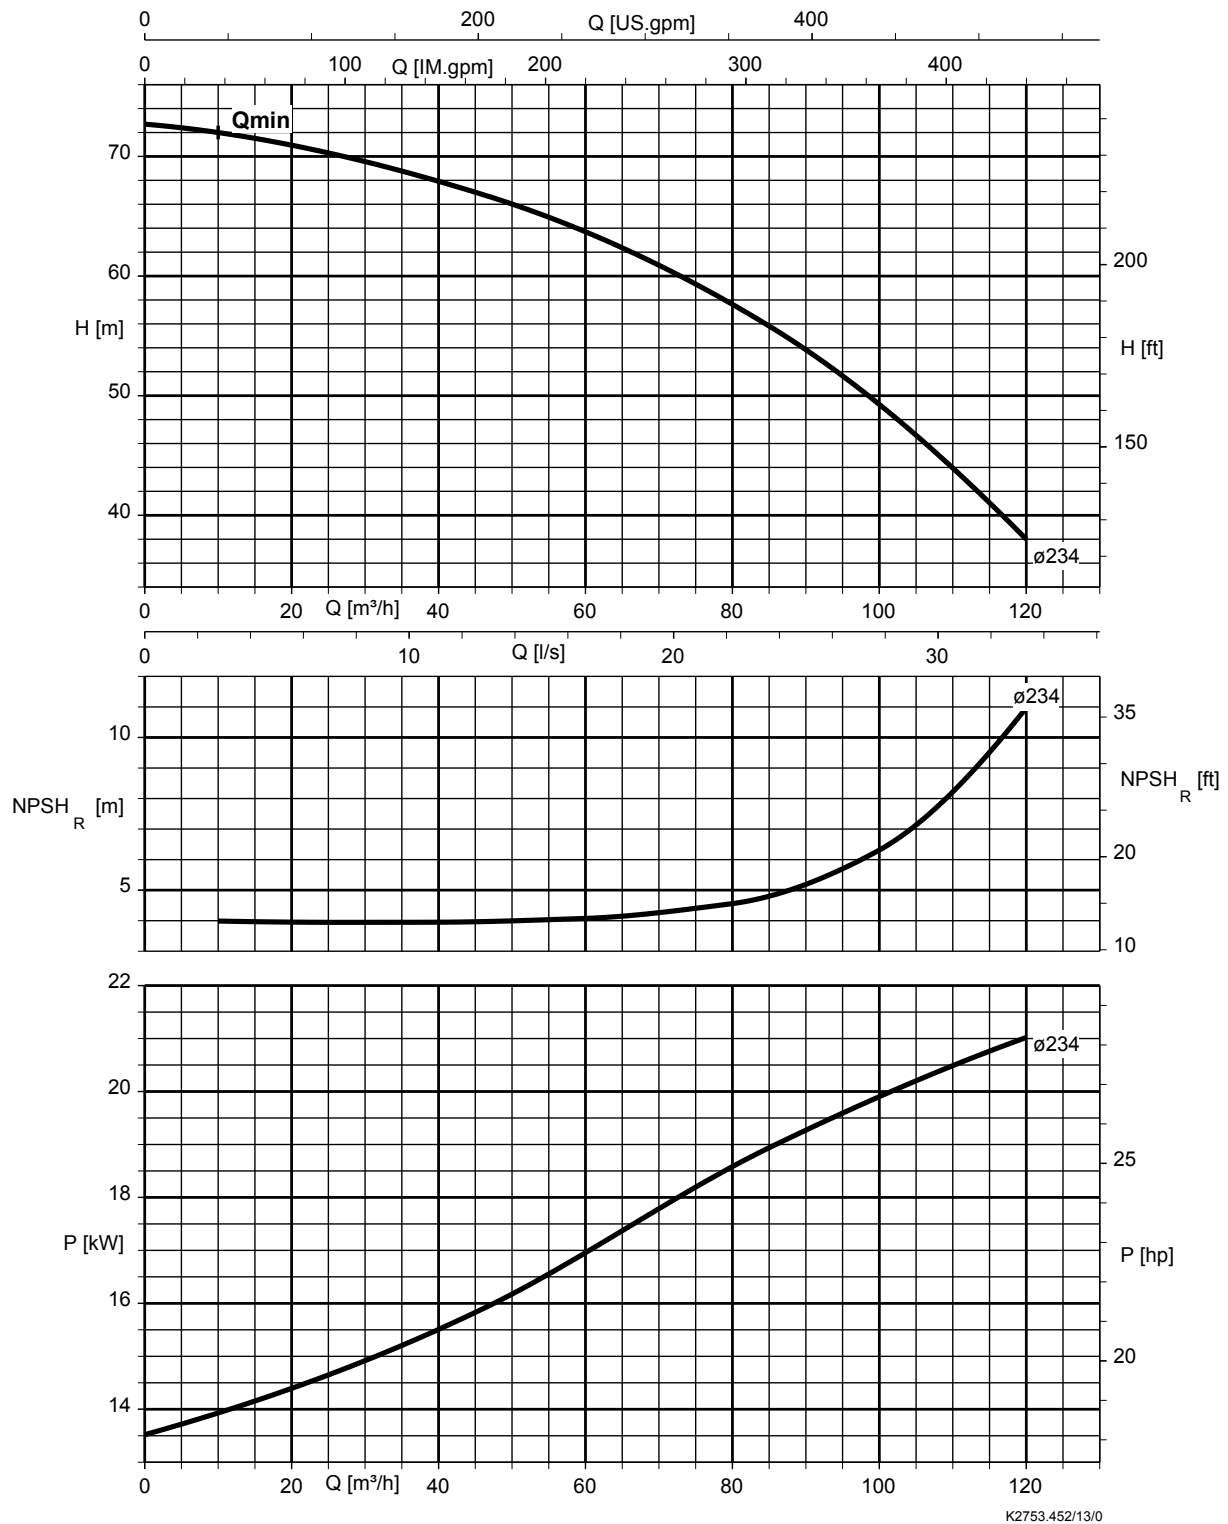


Etaprime L 125-260, n = 2900 rpm

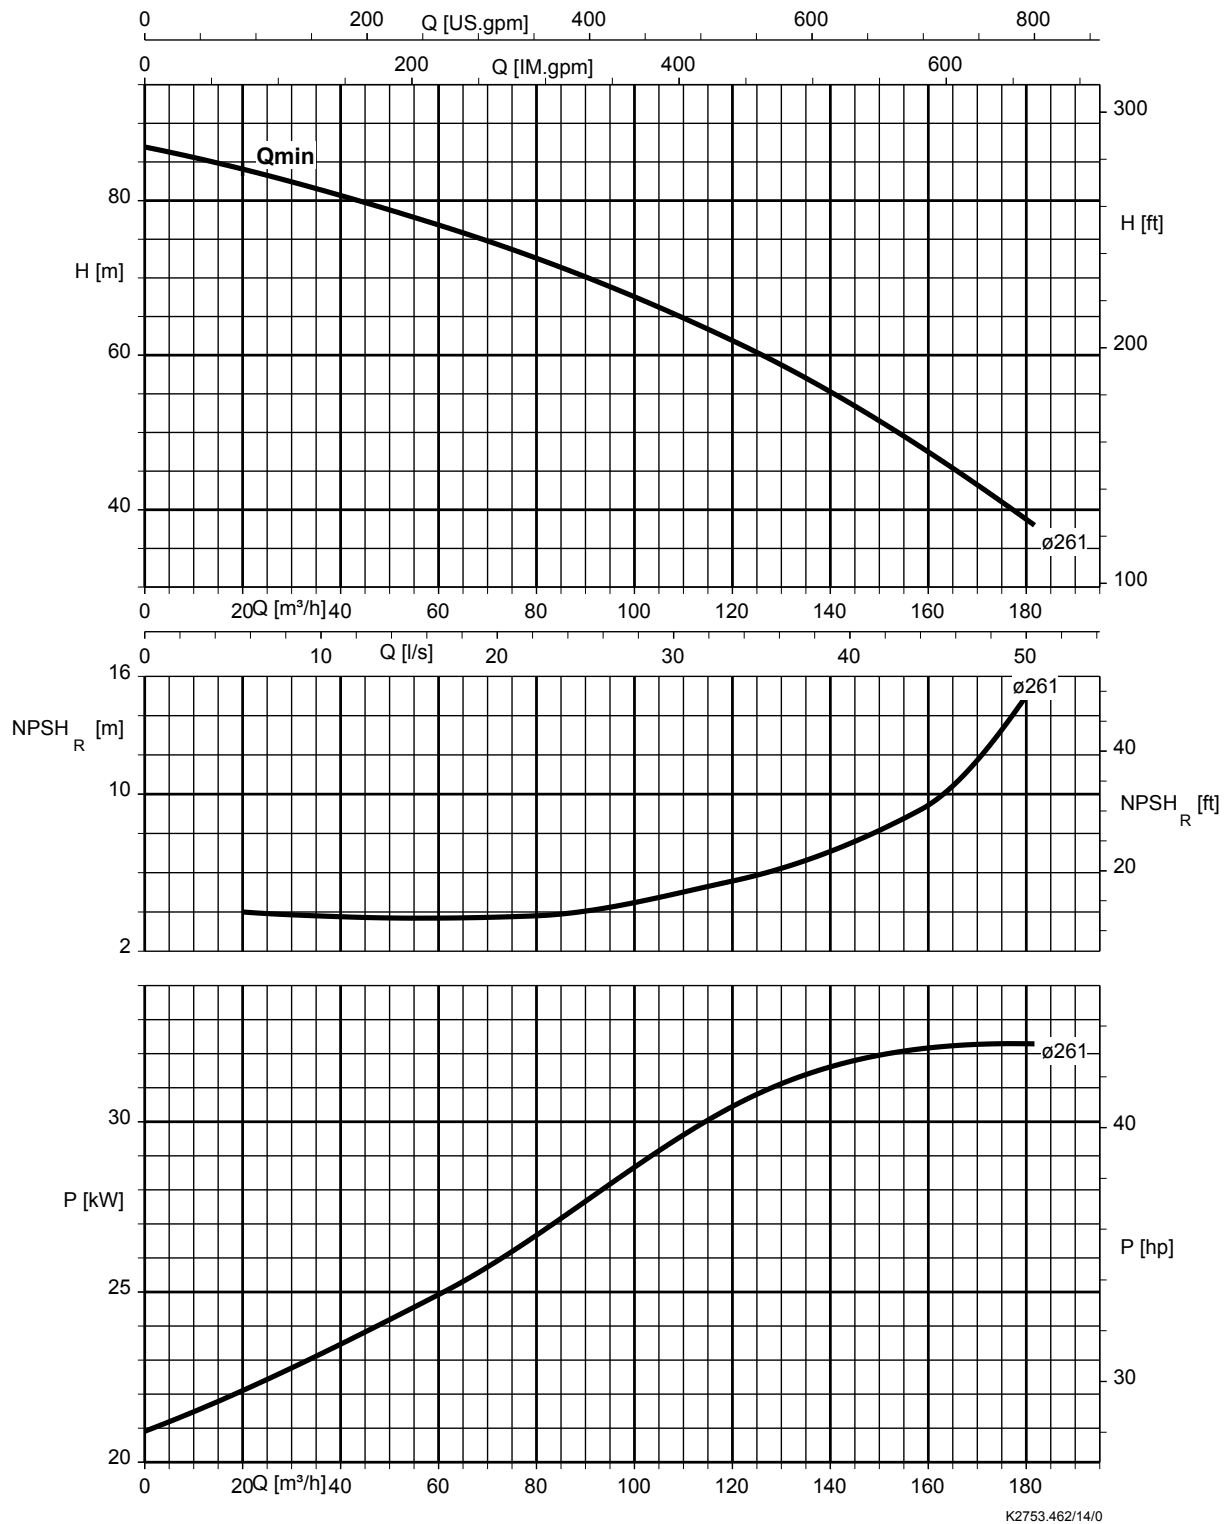


$n = 1450 \text{ rpm}$


Etaprime L/B 025-025-100, $n = 1450 \text{ rpm}$

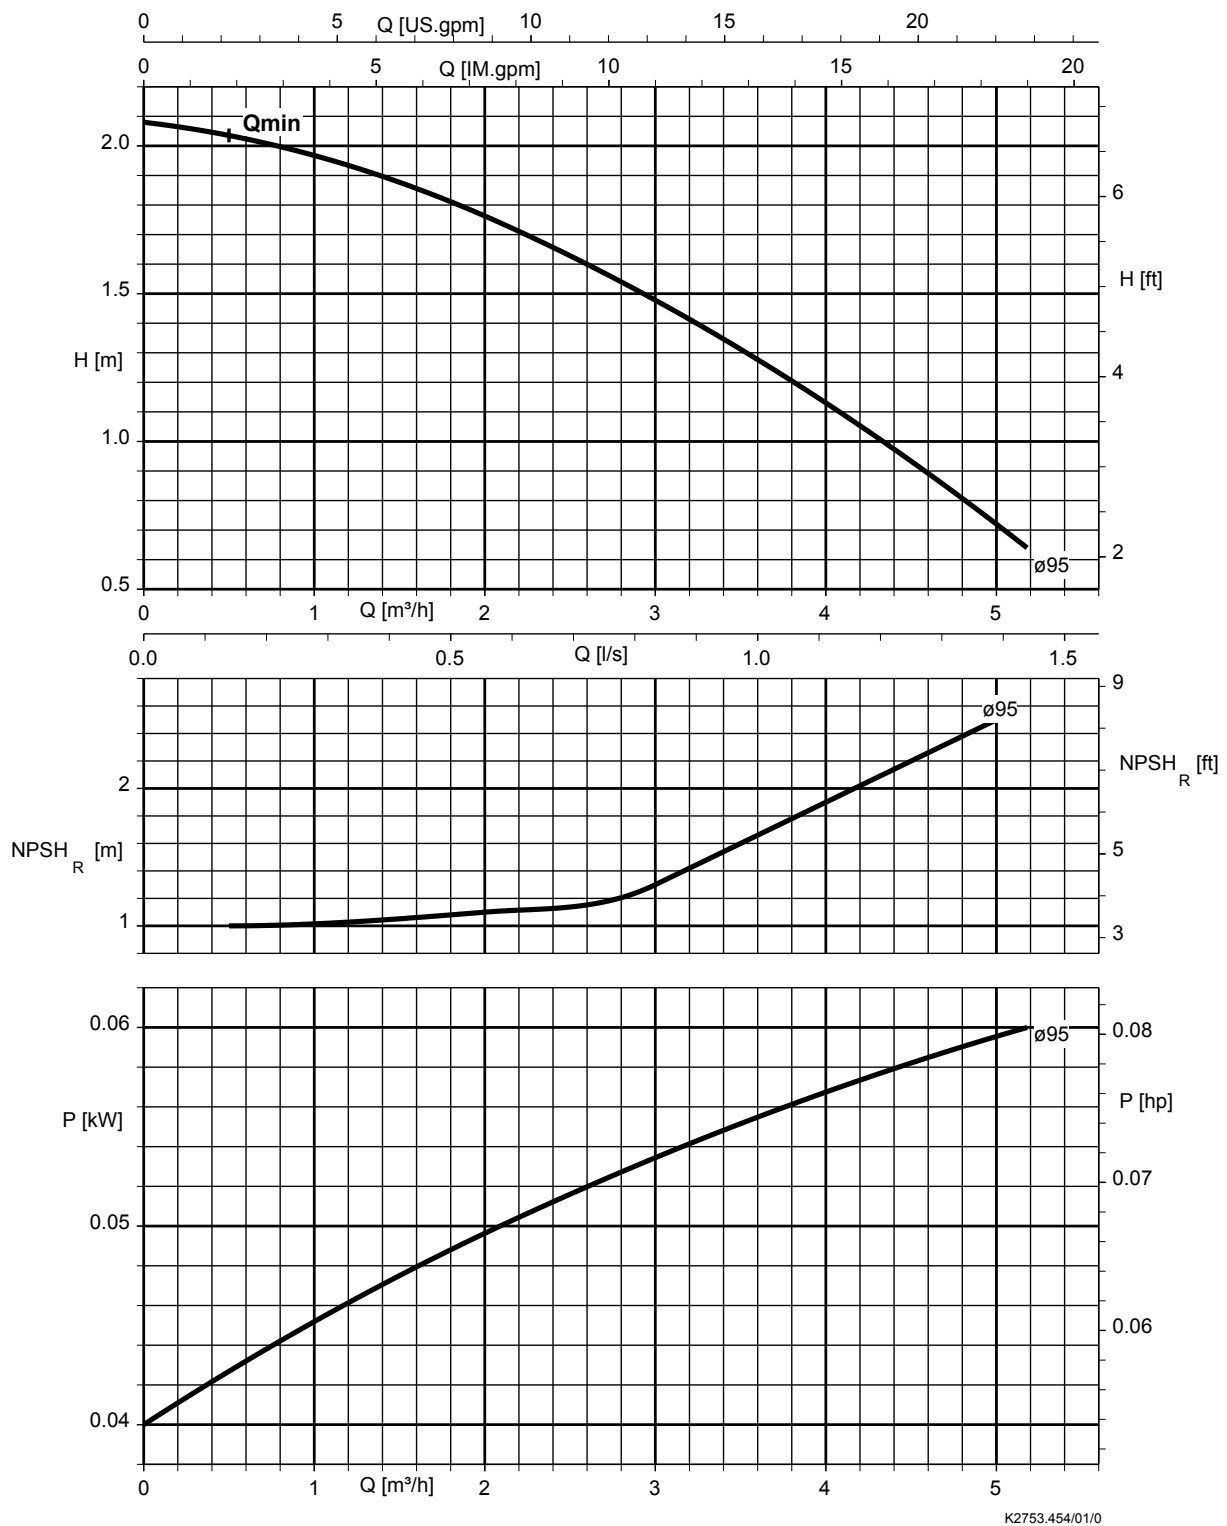


Etaprime L/B 032-032-120, n = 1450 rpm

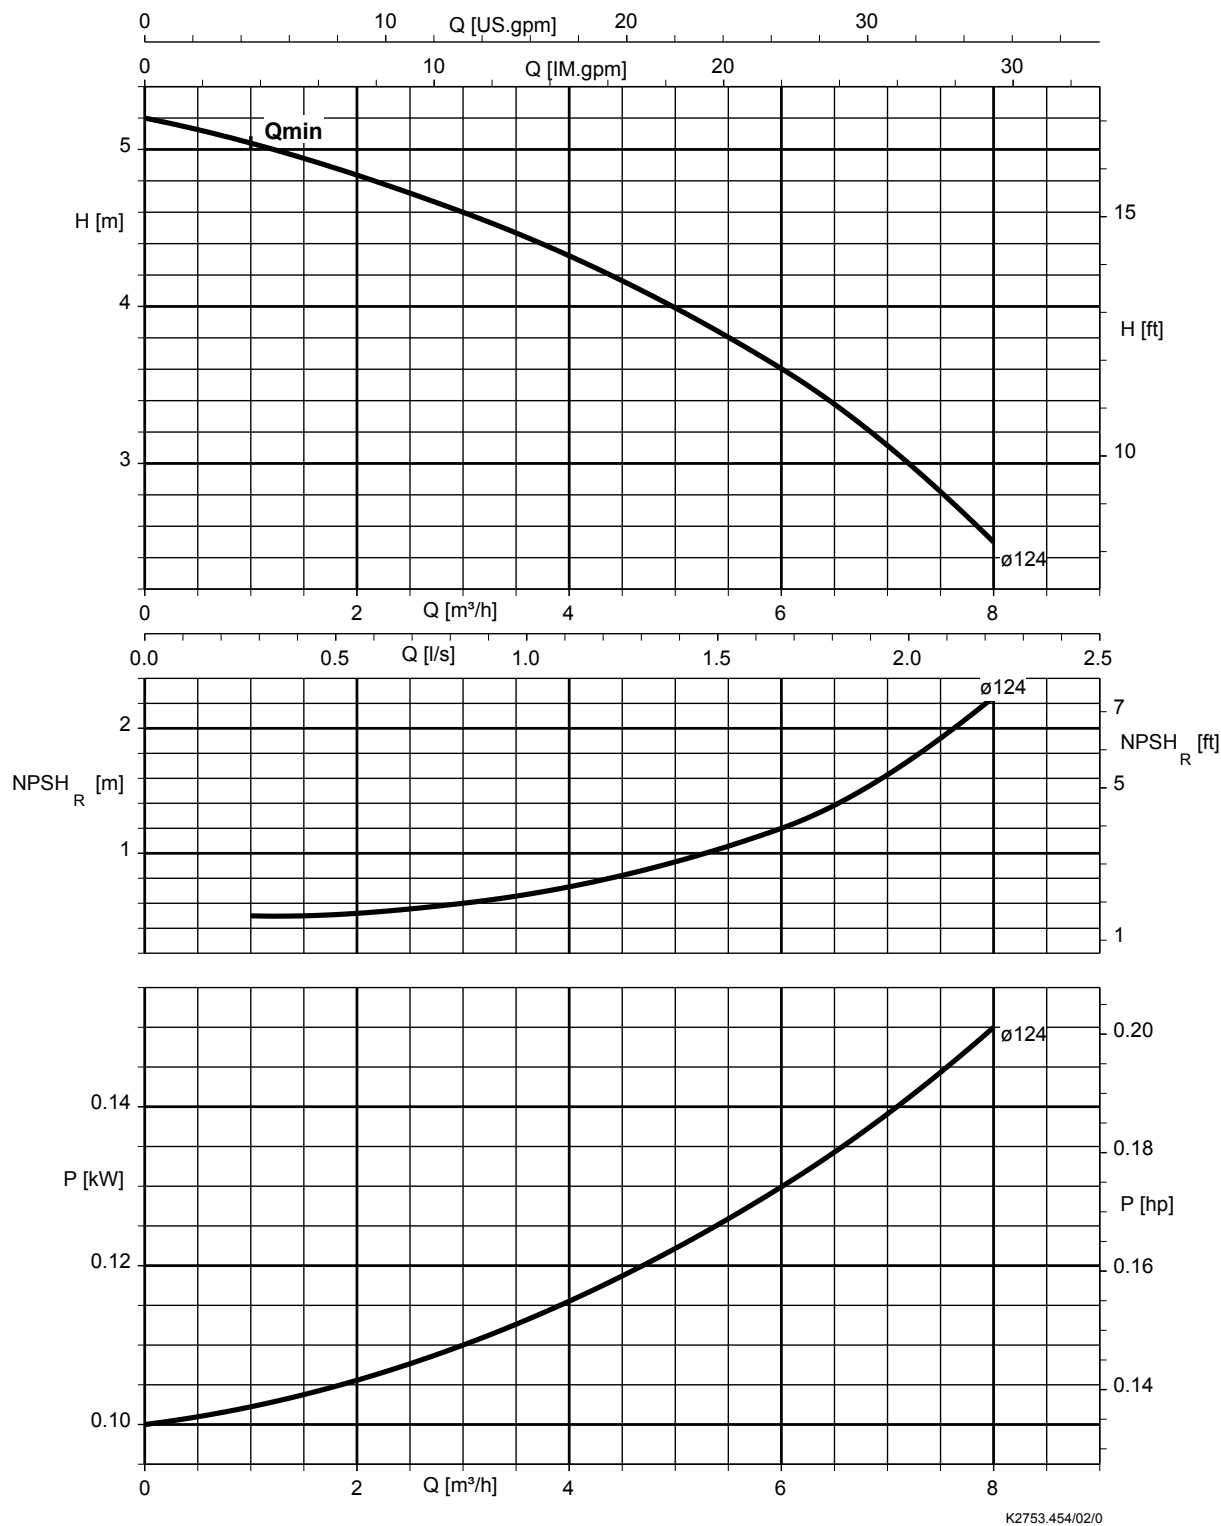


Etaprime L/B 040-040-110, n = 1450 rpm

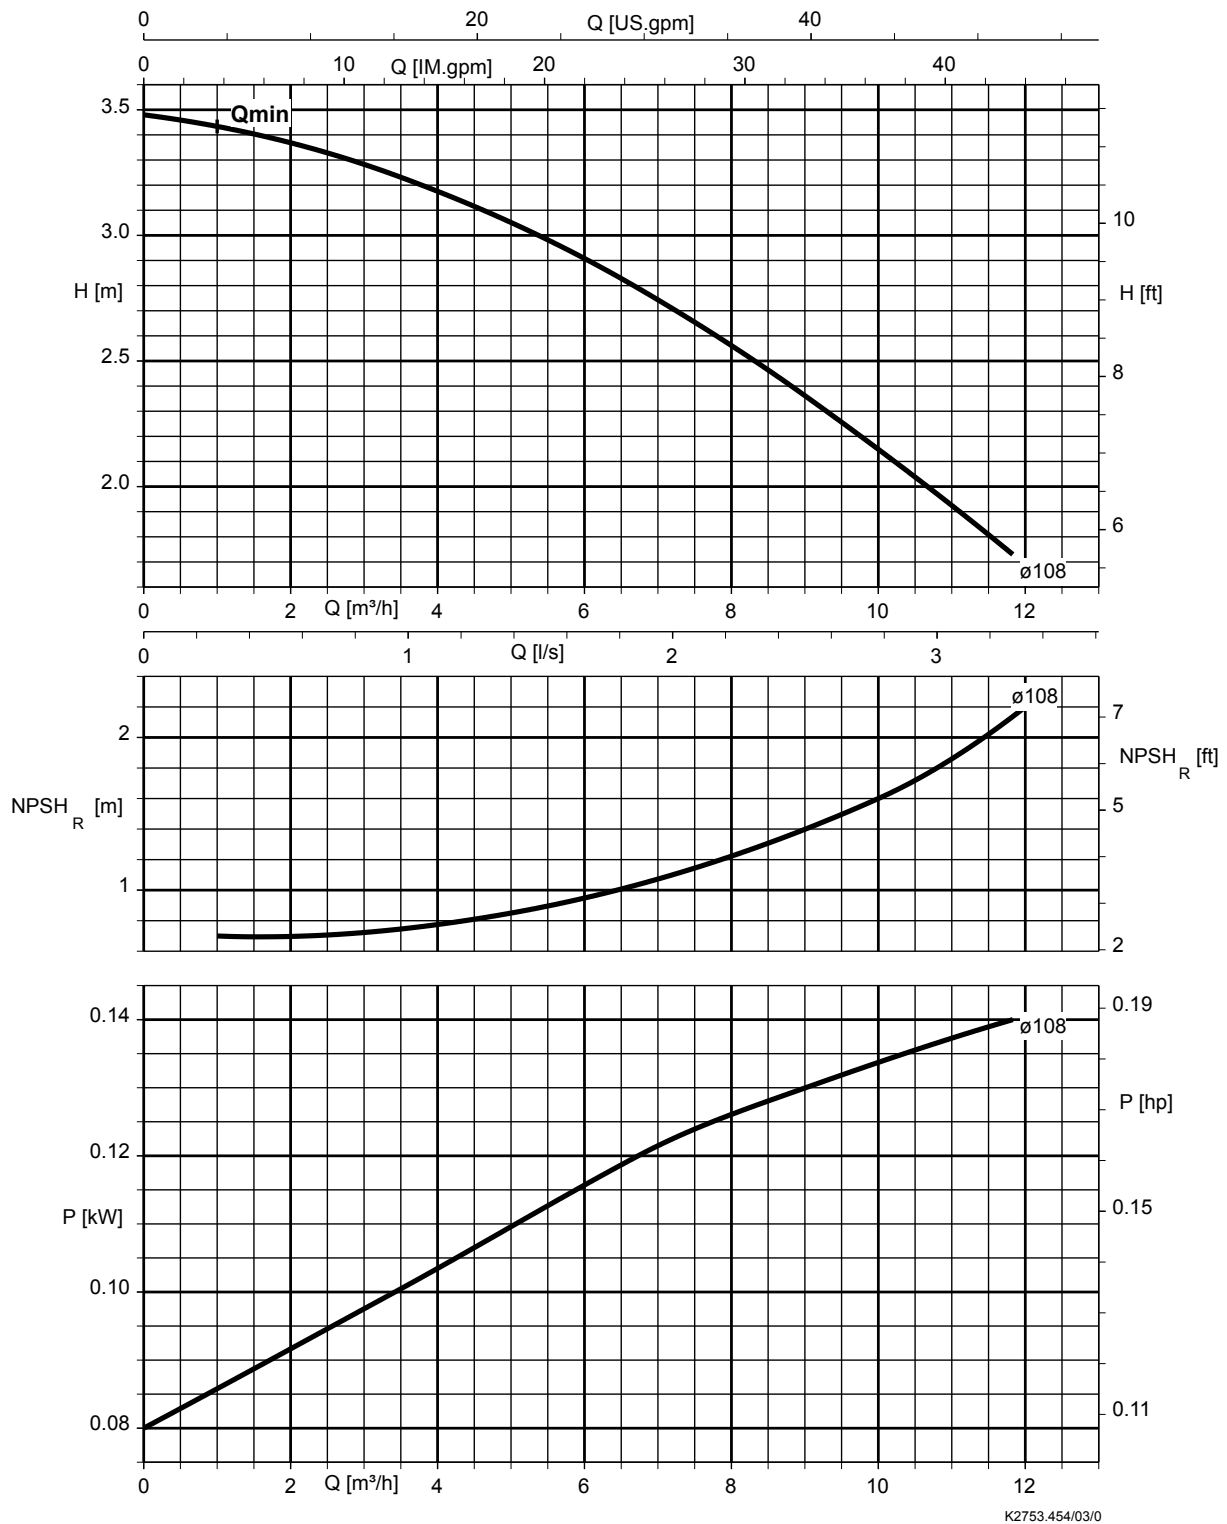


Etaprime L/B 040-040-140, n = 1450 rpm

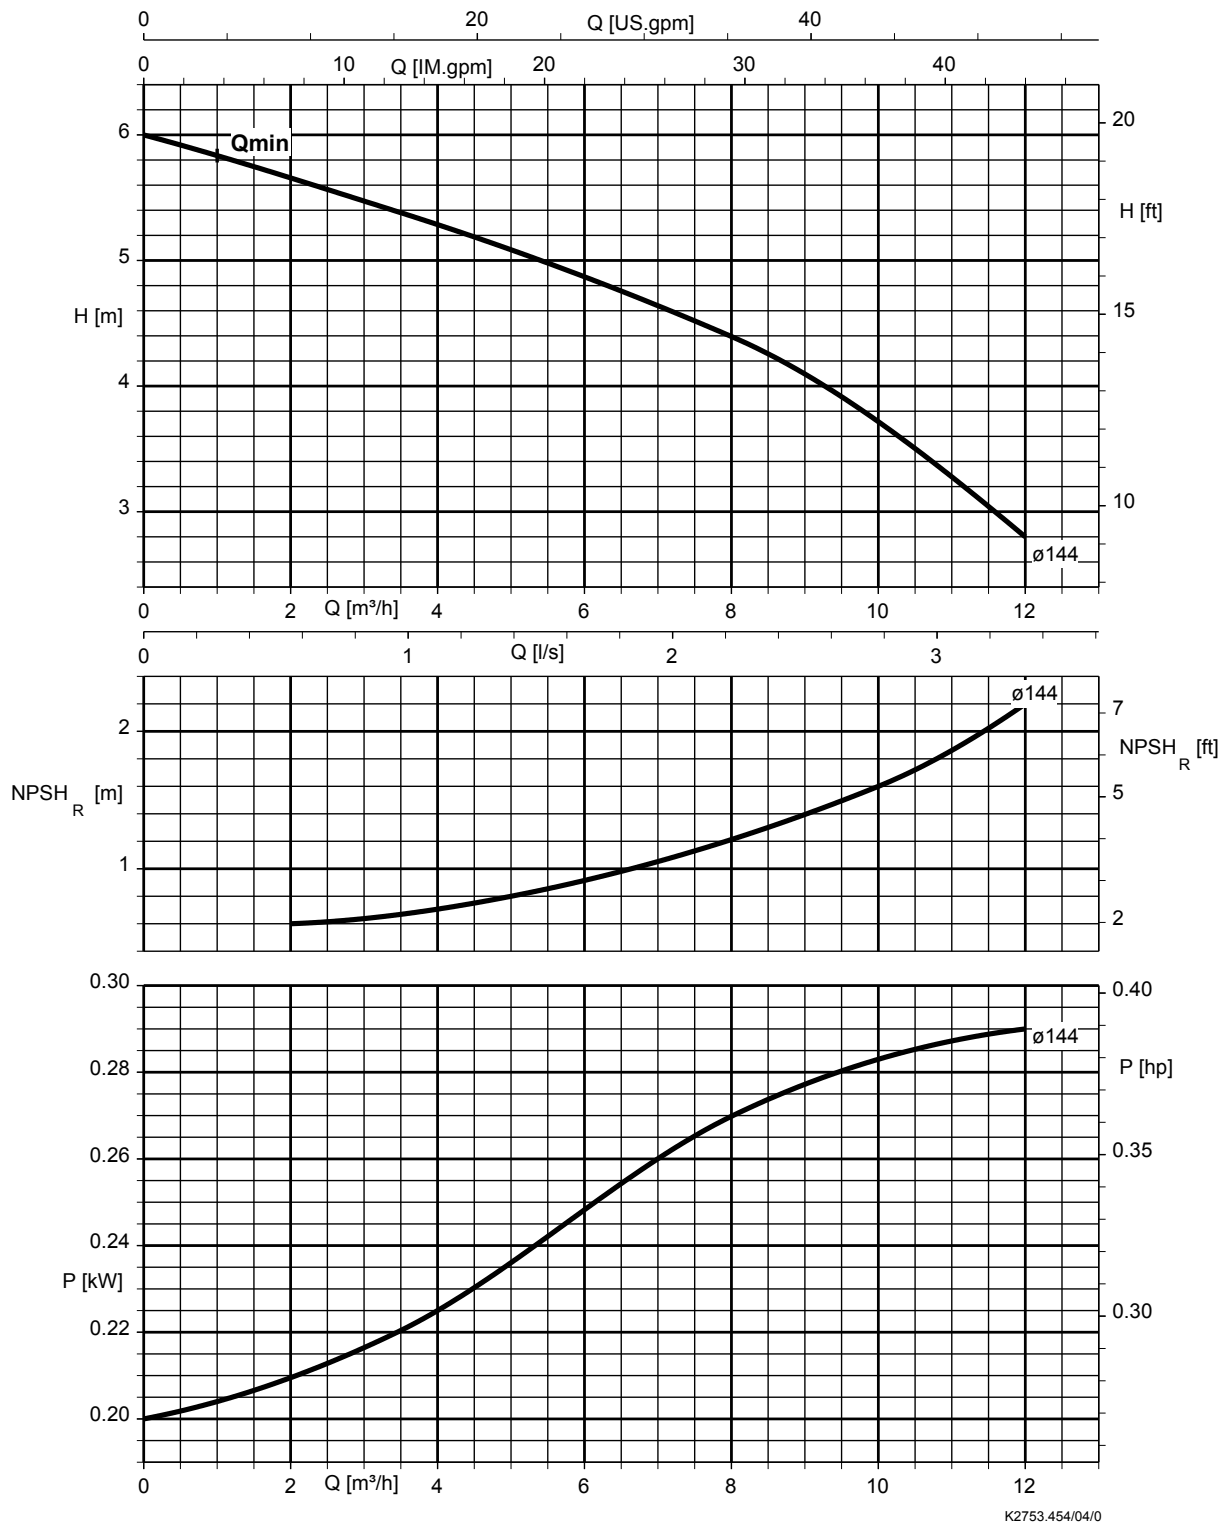


Etaprime L/B 050-050-130, $n = 1450$ rpm

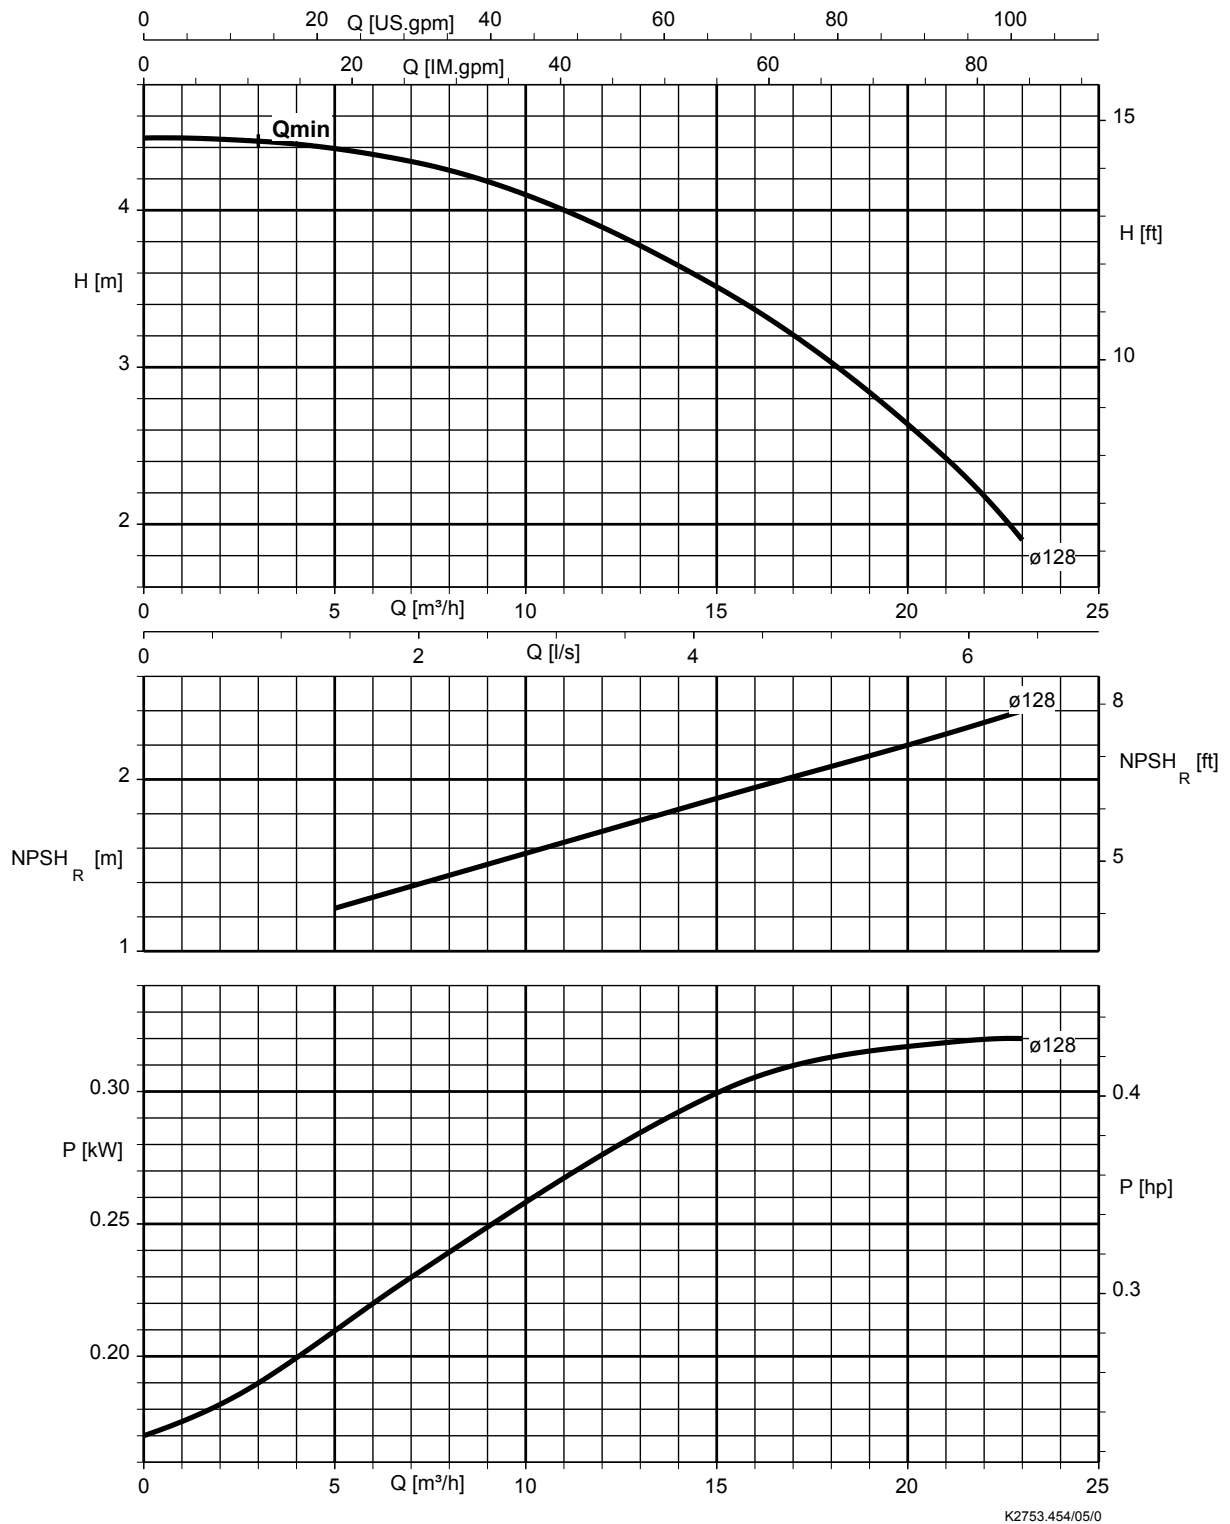


Etaprime L/B 050-050-160, $n = 1450$ rpm

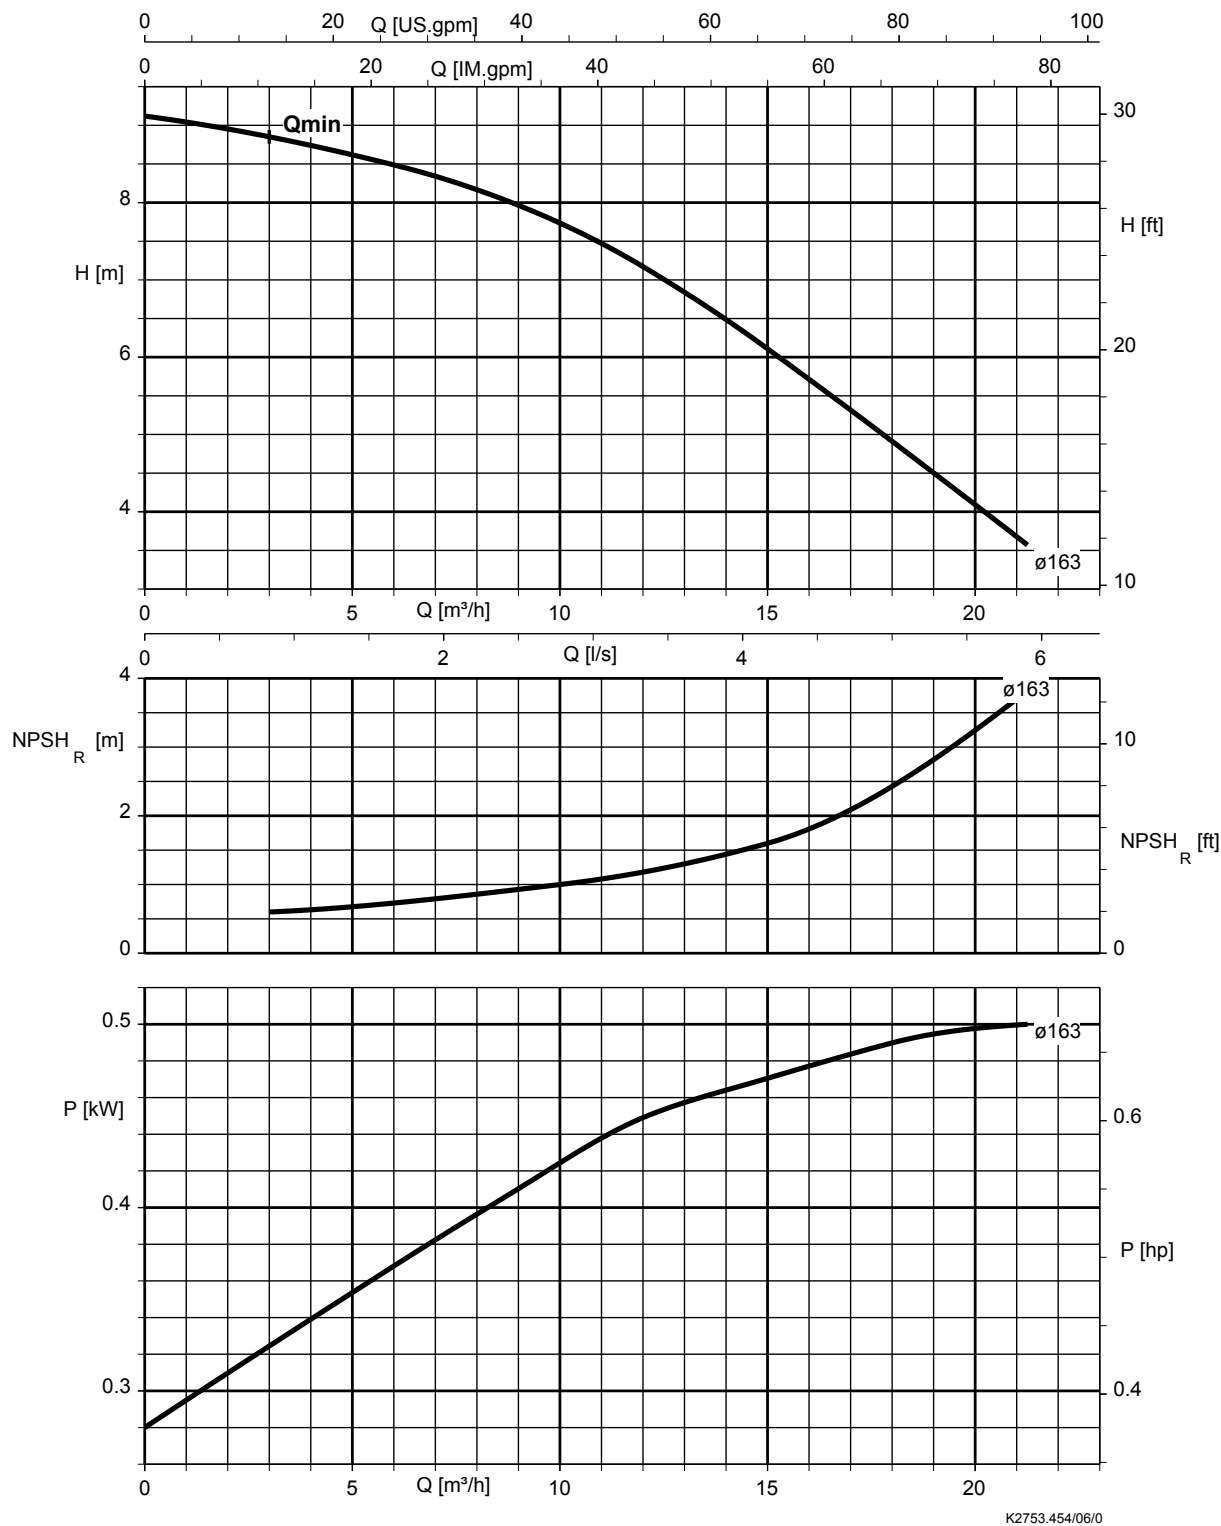


Etaprime L/B 065-065-150, $n = 1450$ rpm

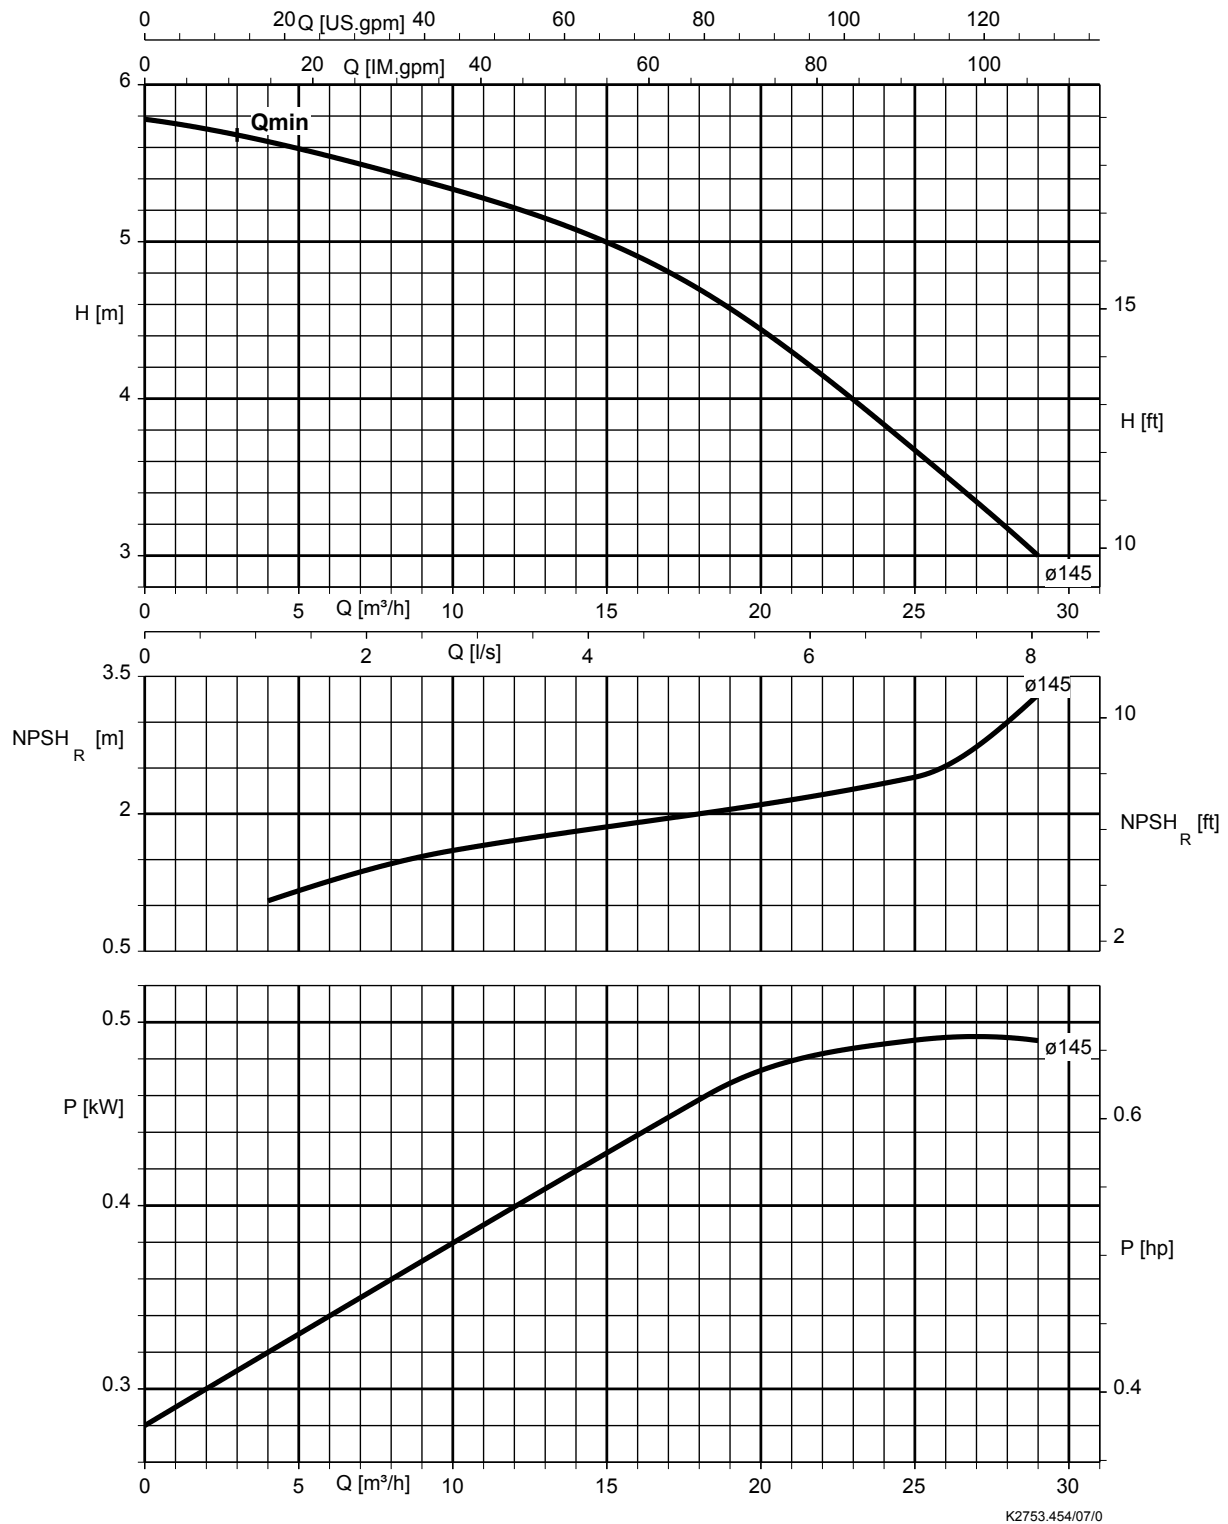


Etaprime L/B 065-065-180, $n = 1450$ rpm

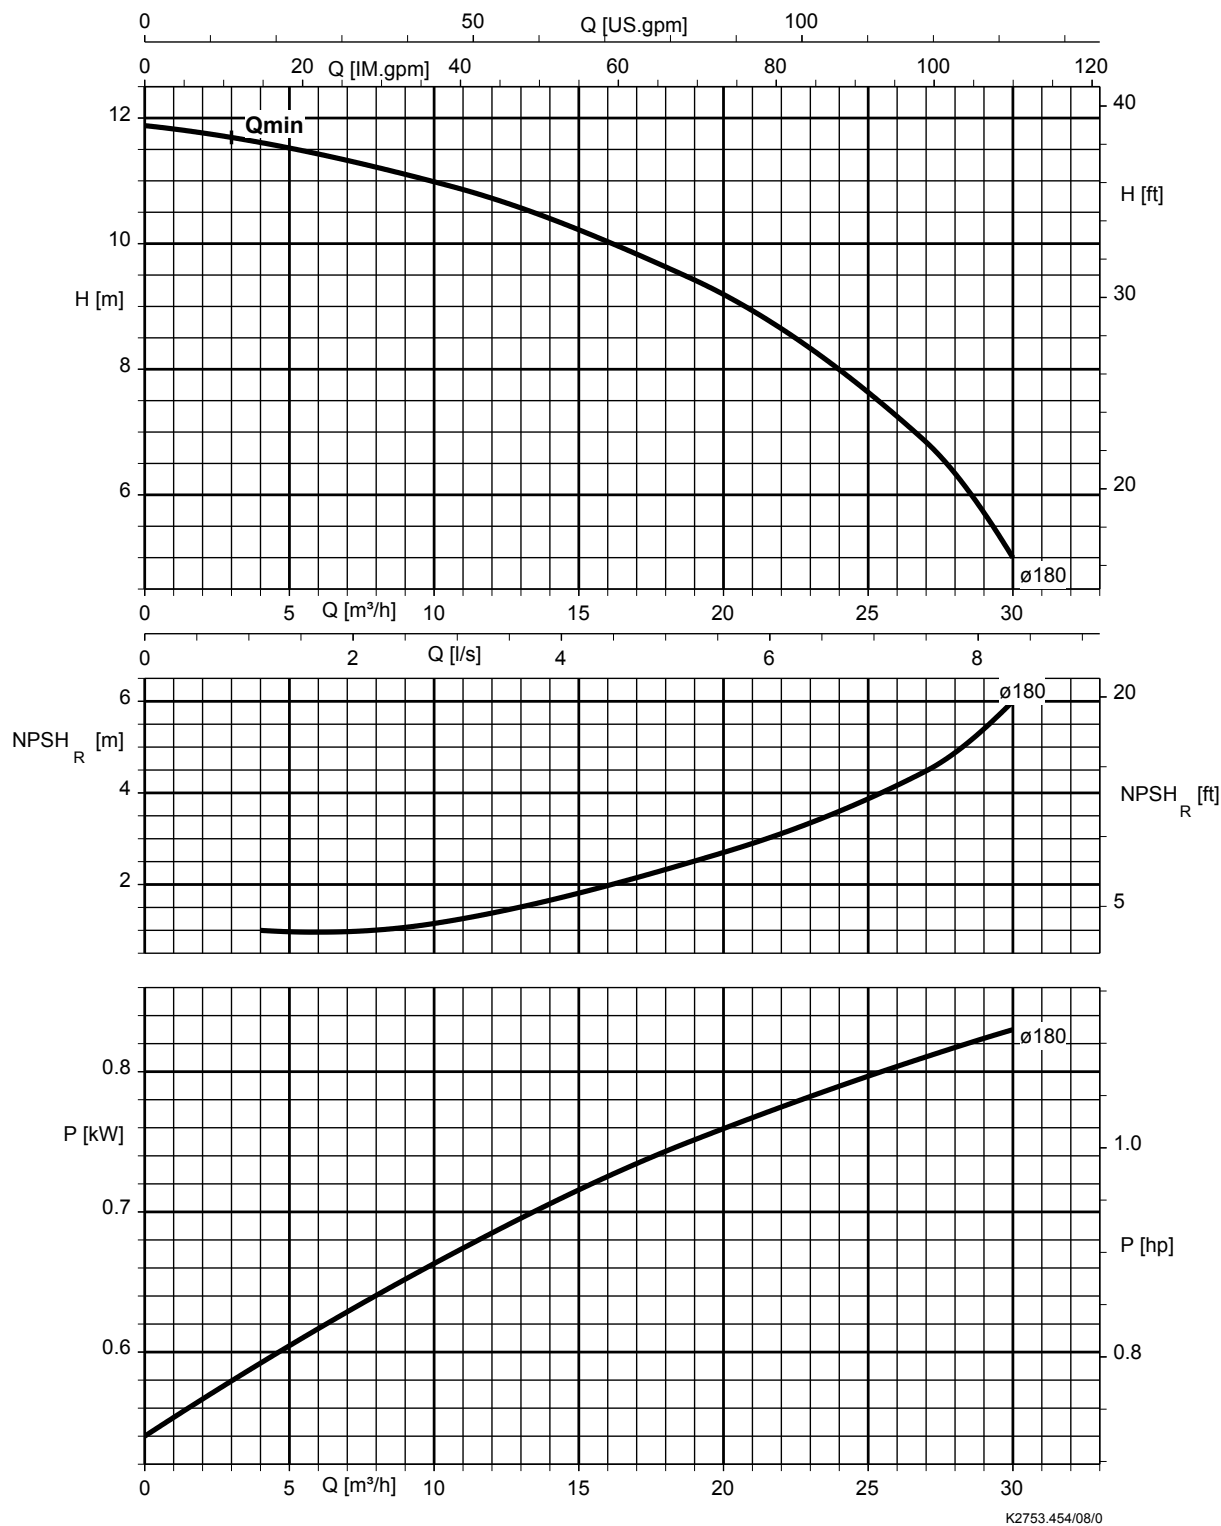


Etaprime L/B 080-080-170, $n = 1450$ rpm

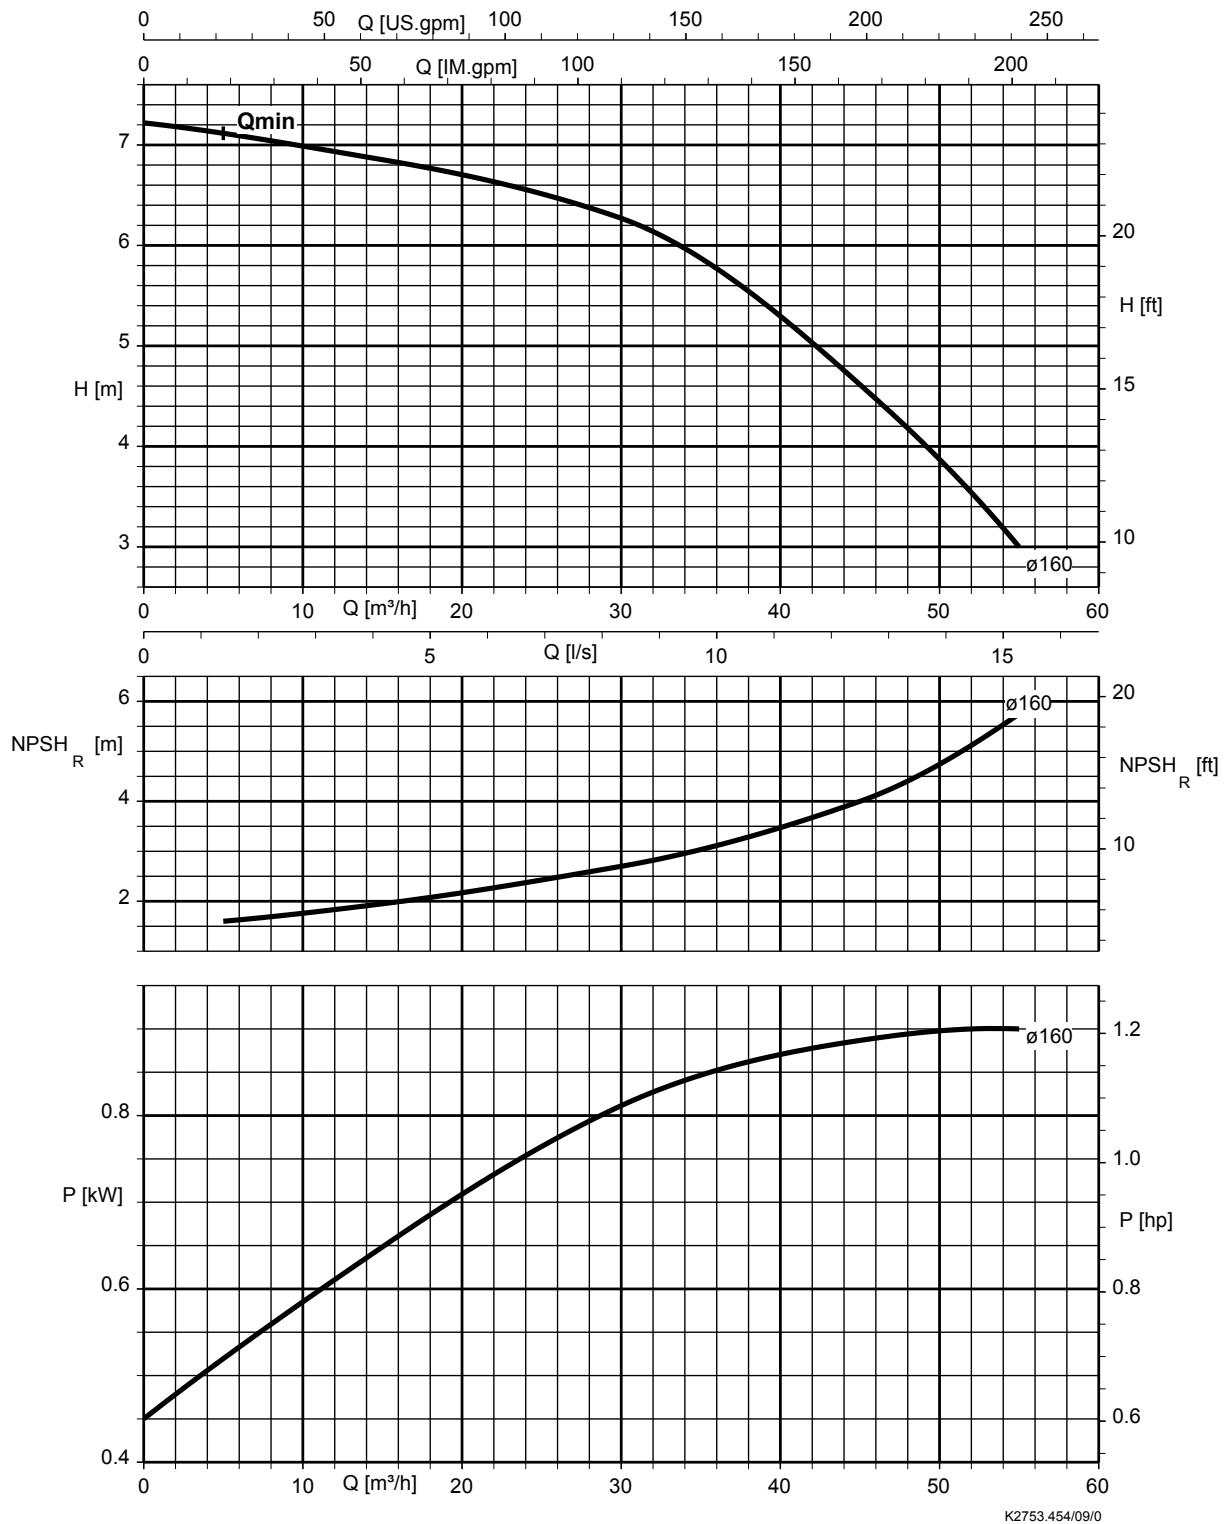


Etaprime L/B 080-080-190, n = 1450 rpm

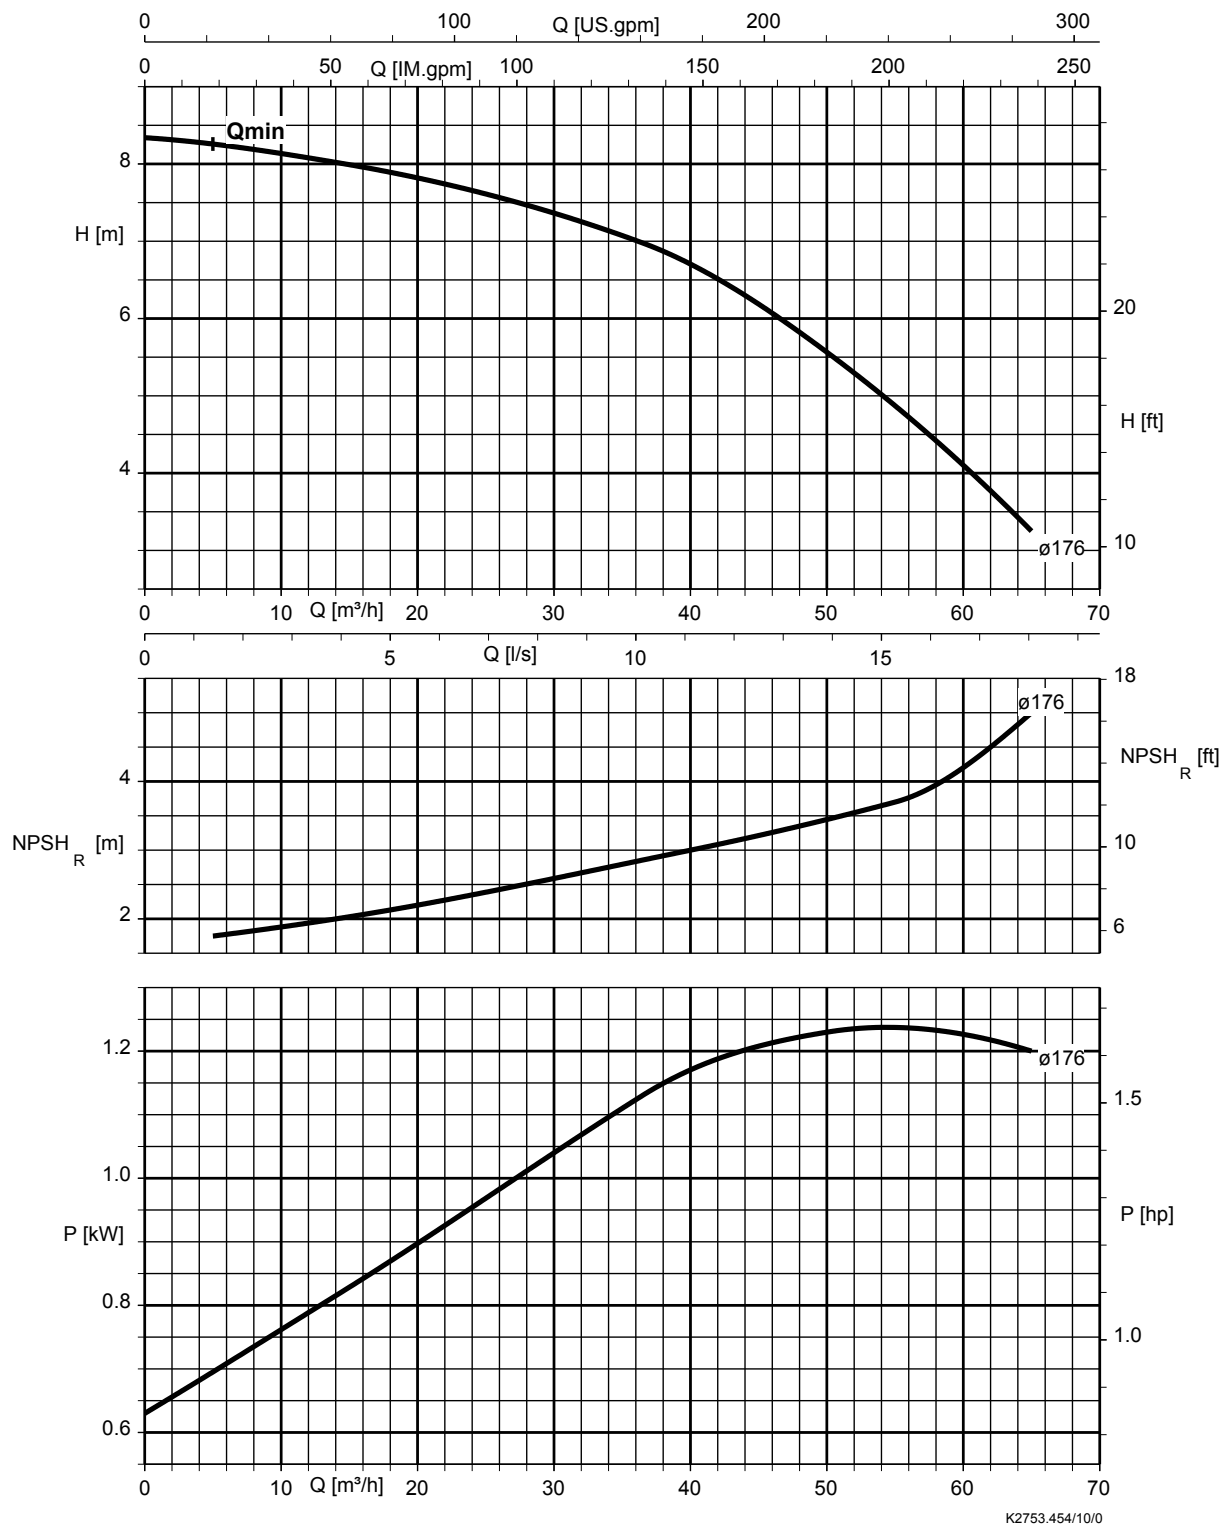


Etaprime L/B 080-080-200, n = 1450 rpm

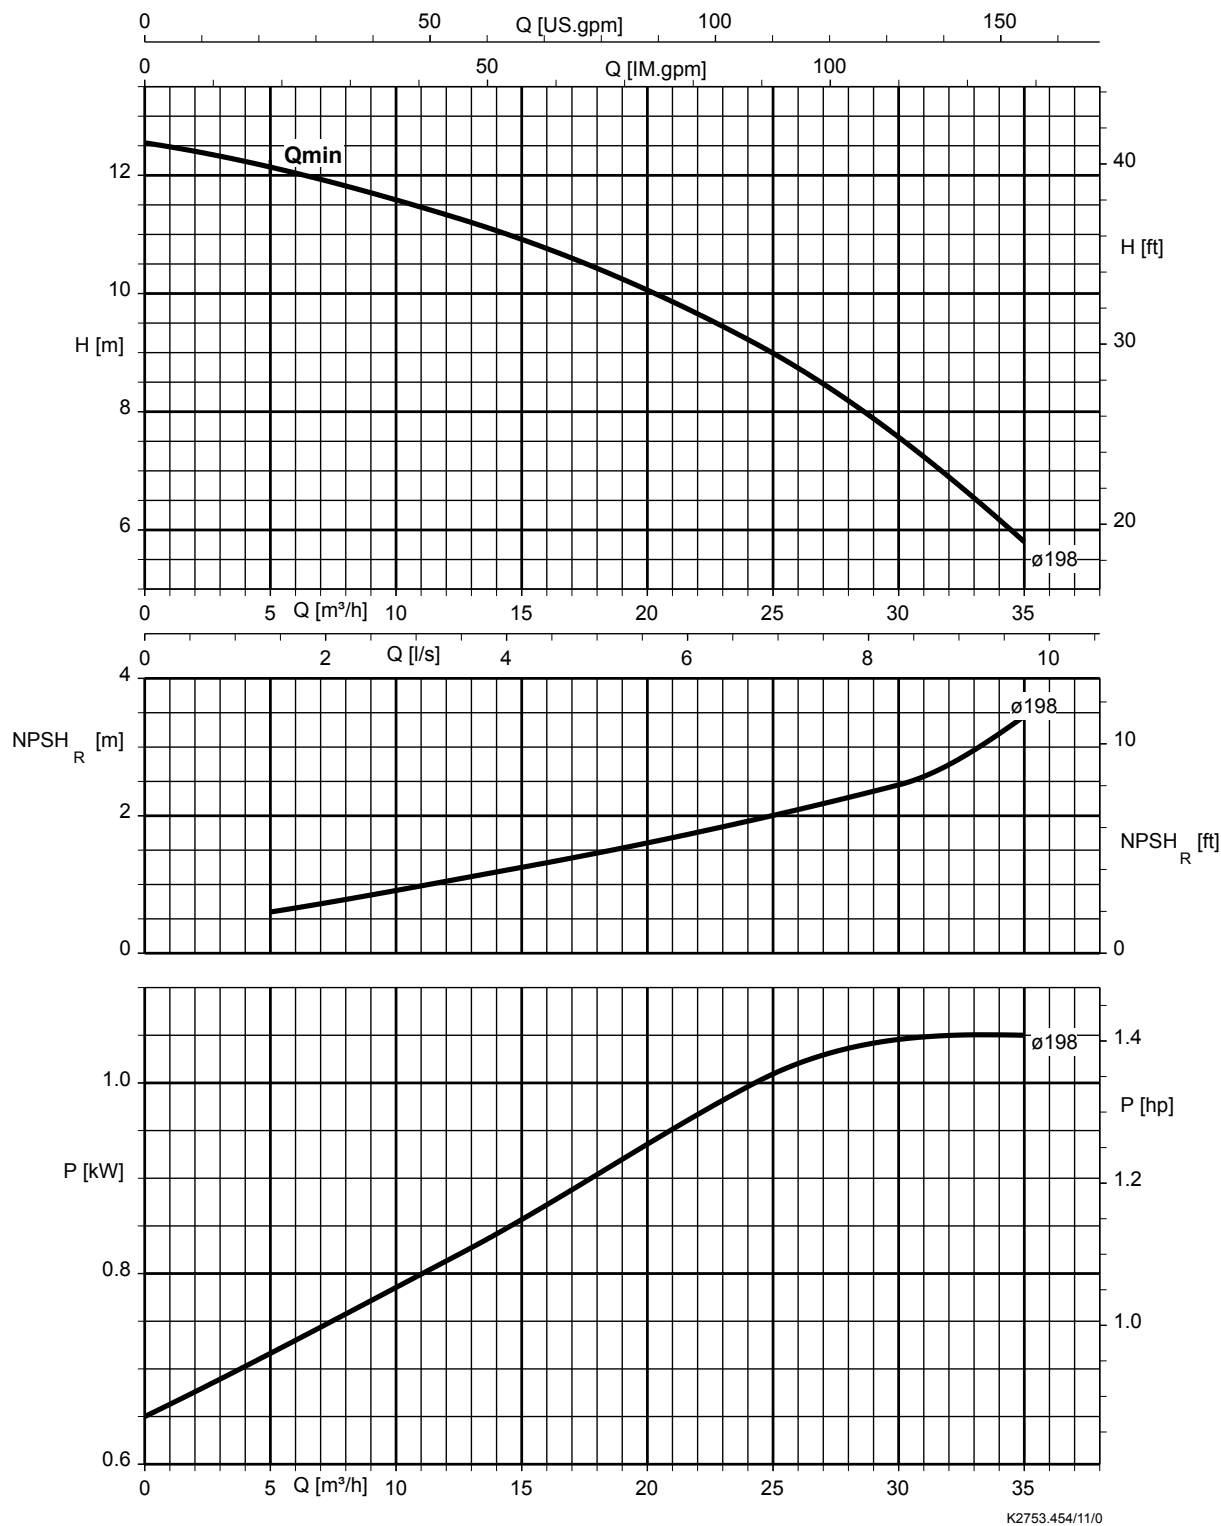


Etaprime L/B 100-100-240.1, $n = 1450$ rpm

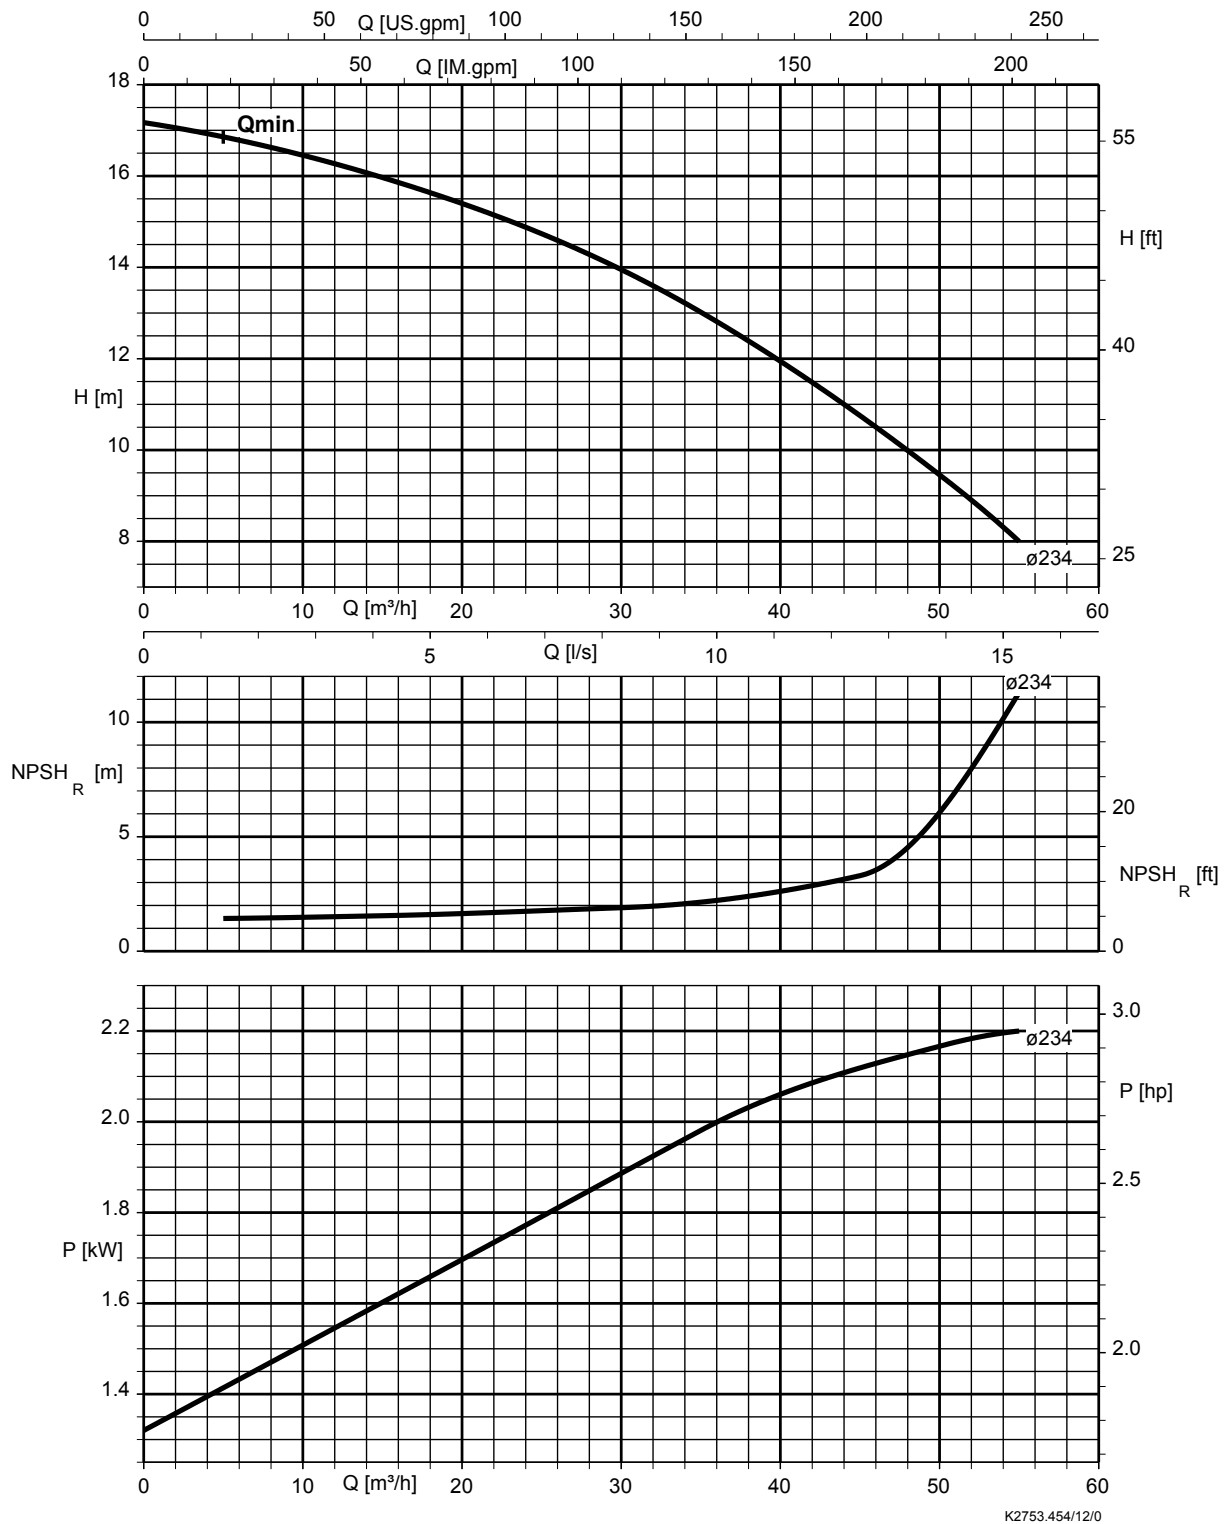

Etaprime L 100-100-240, $n = 1450$ rpm

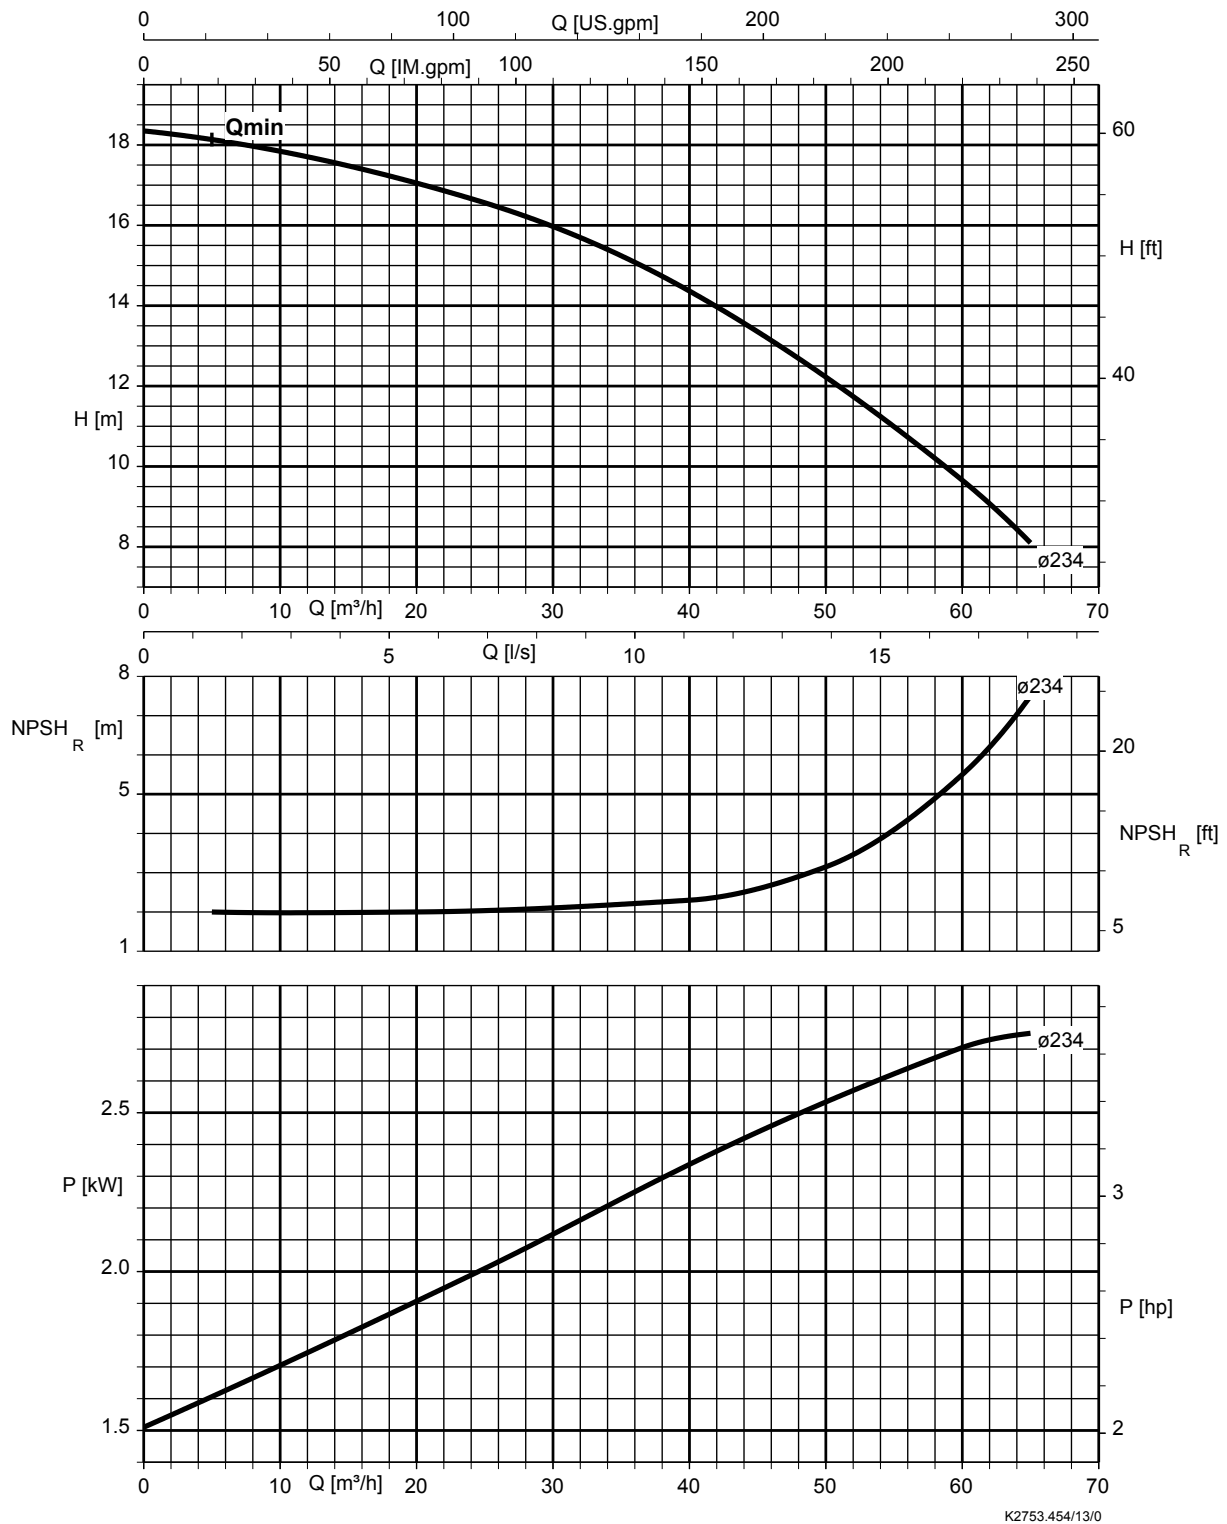

Etaprime L 125-125-260, $n = 1450$ rpm

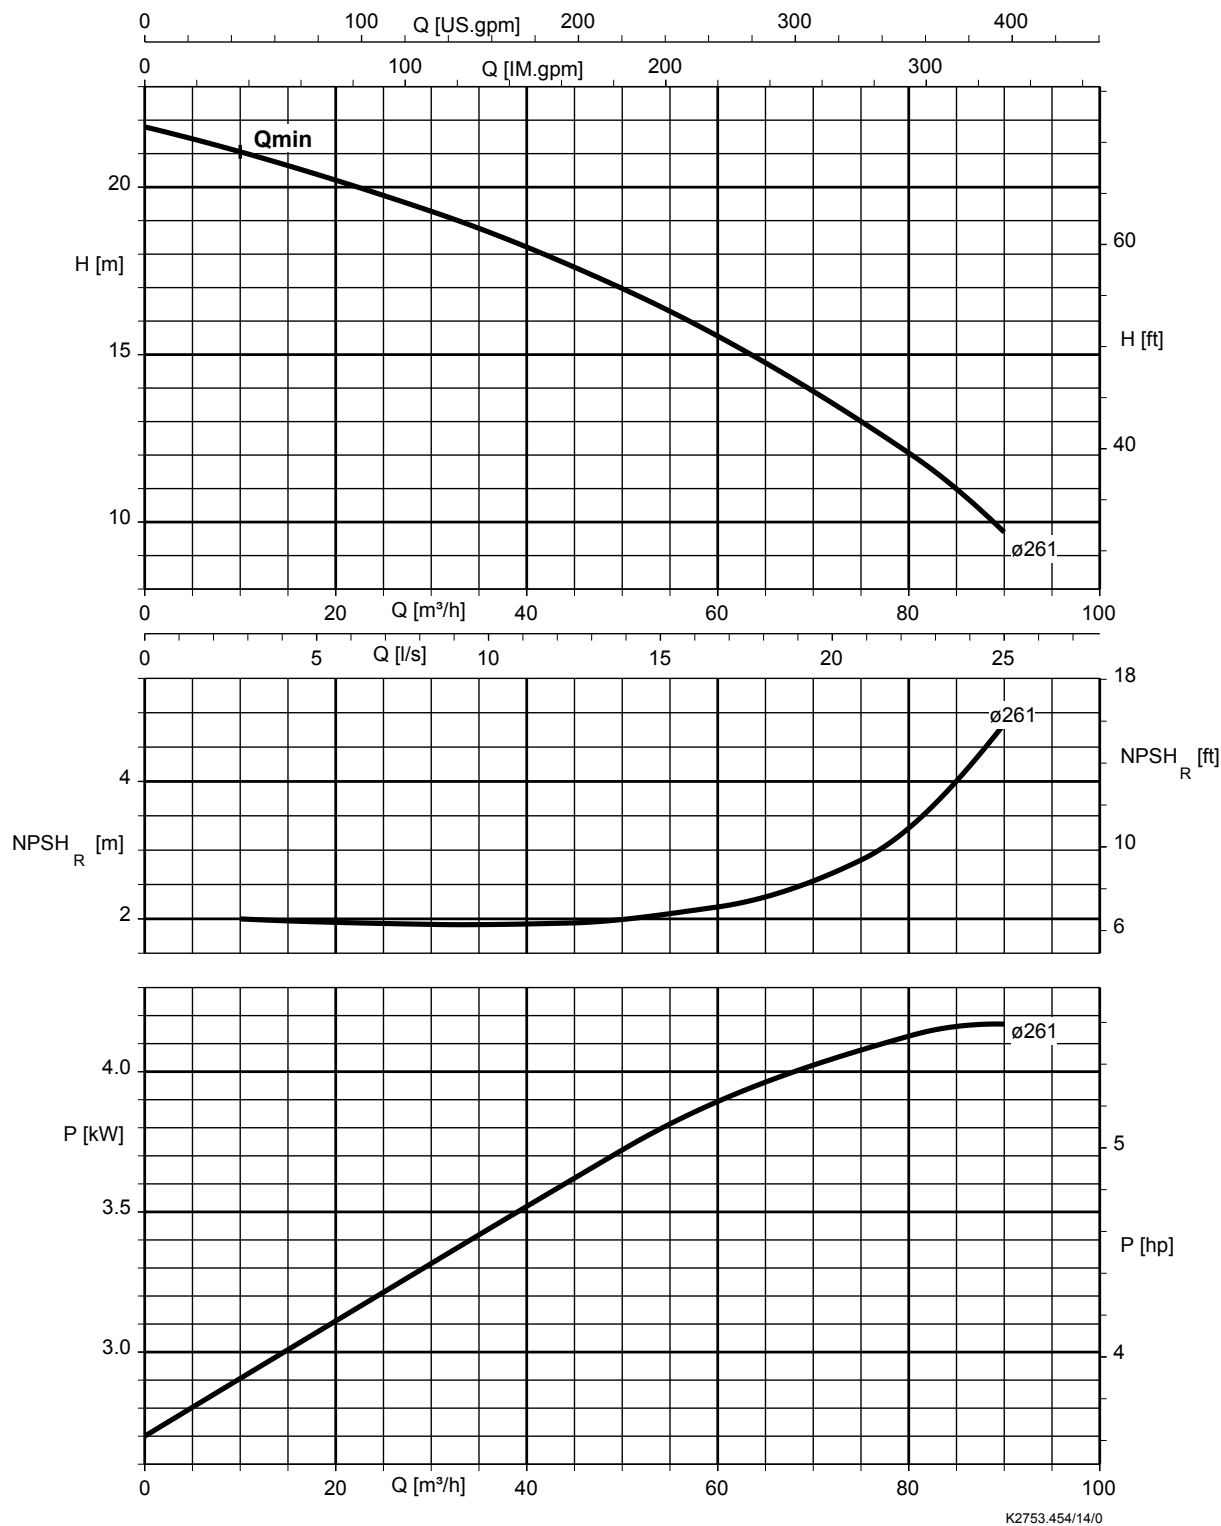



KSB ITUR Spain, S.A.

Camino de Urteta, s/n • 20800 ZARAUTZ (Gipuzkoa) SPAIN

Tel. +34 943 899 899 • Fax +34 943 130 710

www.ksb.com

10.12.2015

2753.45/01-EN